


Note: LM35 Temperature Sensor requires isolating from heatsink with Mica Pad

For ICL7660 if C3 is removed then C4 & C26 are 10uF tantalum.

Connectors\_JST\_XH\_B02B-XH-A\_02x2.50mm\_Straight

Arduino\_Sockets:DIP-30\_Q\_ELL

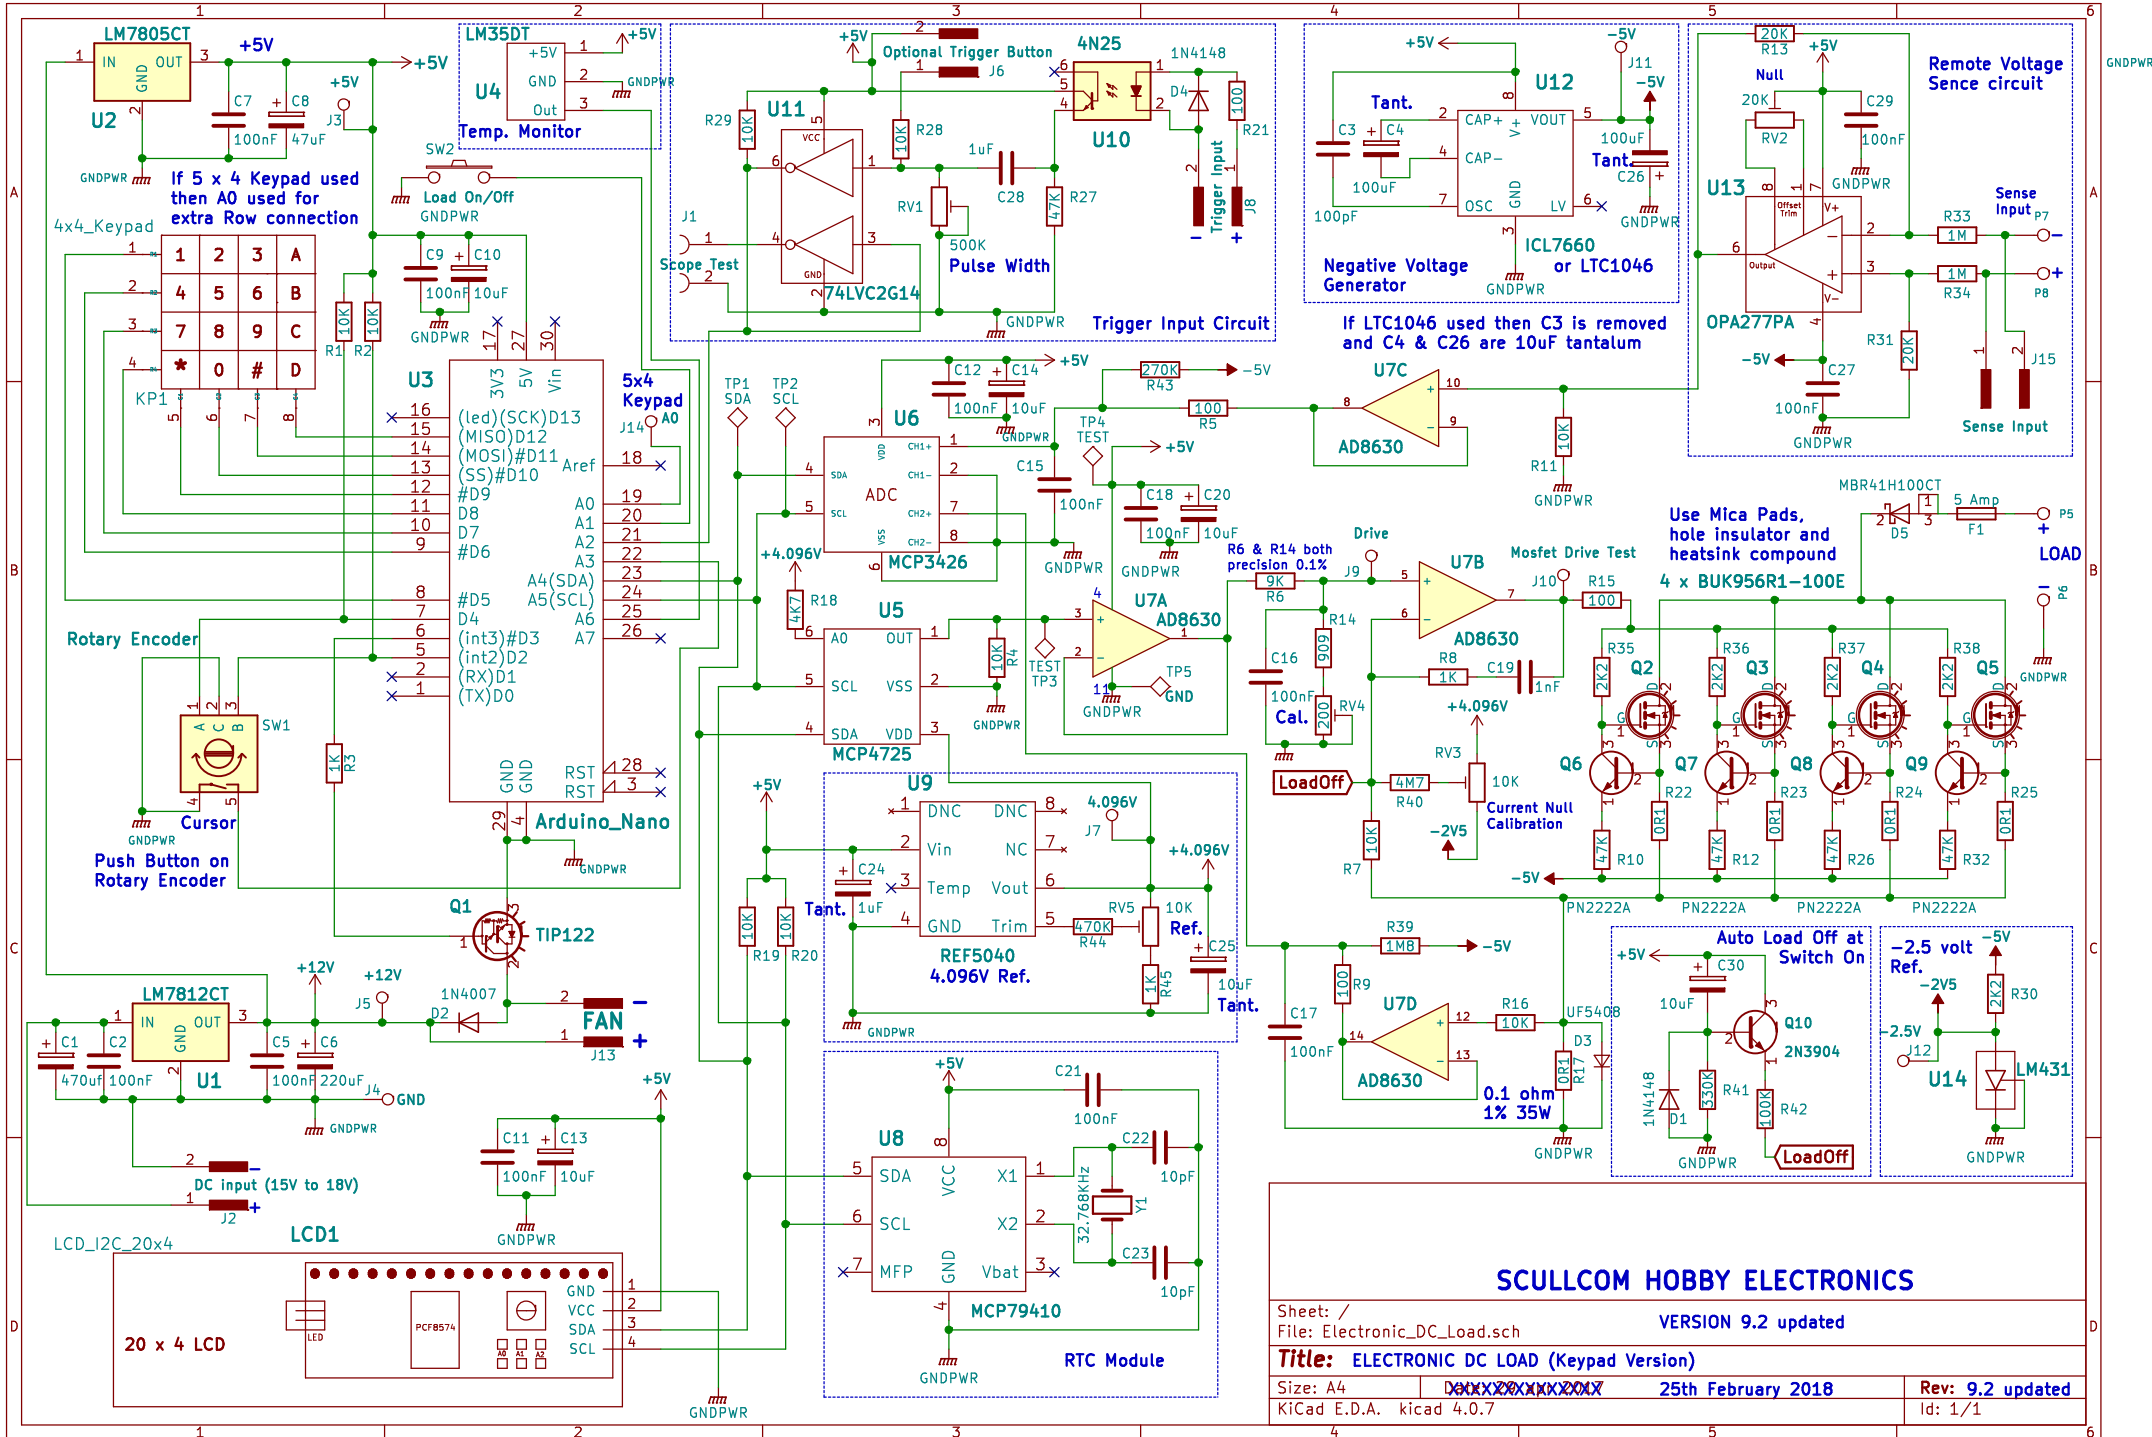

## SCULLCOM HOBBY ELECTRONICS

Sheet: /

File: Electronic\_DC\_Load.sch

VERSION 9.2 updated

**Title:** ELECTRONIC DC LOAD (Keypad Version)

Size: A4

XXXXXXXXXX

25th February 2018

Rev: 9.2 updated

KiCad E.D.A. kicad 4.0.7

Id: 1/1