


OCTOPUS OSCILLOSCOPE COMPONENT TESTER

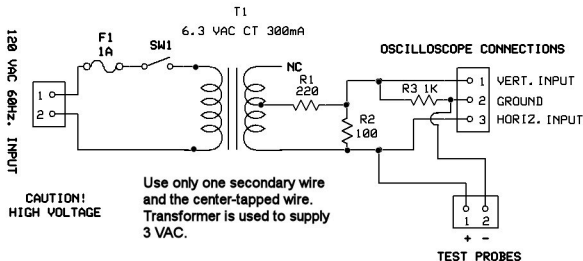


PARTS LIST

R1 - 220 OHM 1/2 RESISTOR
R2 - 100 OHM 1/2 RESISTOR
R3 - 1K OHM 1/2 RESISTOR
T1 - 6.3 VAC 300 mA. TRANSFORMER
F1 - 1A / 125 VAC FUSE
SW1 - SPST SWITCH

Test Voltage: 1 VAC Max.
Test Current: 1 mA Max.

TYPICAL PATTERNS

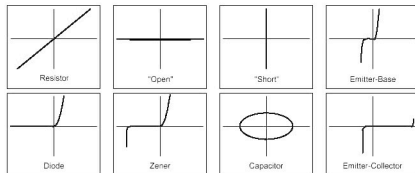

NOTES: Before turning on the power to the Octopus, set the oscilloscope to X-Y OPERATION. Adjust X and Y controls to center oscilloscope CRT dot. Turn on power to the Octopus, short Test Probes together, adjust oscilloscope gain to produce a vertical line covering about 75% of the CRT scale.

© 2008 SMC ELECTRONICS

www.smcelectronics.com

SMC ELECTRONICS
OCTOPUS