

## DUAL SP4T ANALOG SWITCH

### 3.3-V/2.5-V DUAL 4:1 ANALOG MULTIPLEXER/DEMULTIPLEXER

#### FEATURES

- Isolation in the Powered-Down Mode,  $V_+ = 0$
- Low ON-State Resistance
- Low Charge Injection
- Excellent ON-State Resistance Matching
- Low Total Harmonic Distortion (THD)
- 2.3-V to 3.6-V Single-Supply Operation
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
- ESD Performance Tested Per JESD 22
  - 2000-V Human-Body Model (A114-B, Class II)
  - 1000-V Charged-Device Model (C101)

#### DESCRIPTION



The TS3A5017 is a dual single-pole quadruple-throw (4:1) analog switch that is designed to operate from 2.3 V to 3.6 V. This device can handle both digital and analog signals, and signals up to  $V_+$  can be transmitted in either direction.

**FUNCTION TABLE**


| EN | IN2 | IN1 | D TO S,<br>S TO D  |
|----|-----|-----|--------------------|
| L  | L   | L   | D = S <sub>1</sub> |
| L  | L   | H   | D = S <sub>2</sub> |
| L  | H   | L   | D = S <sub>3</sub> |
| L  | H   | H   | D = S <sub>4</sub> |
| H  | X   | X   | OFF                |

#### APPLICATIONS

- Sample-and-Hold Circuits
- Battery-Powered Equipment
- Audio and Video Signal Routing
- Communication Circuits

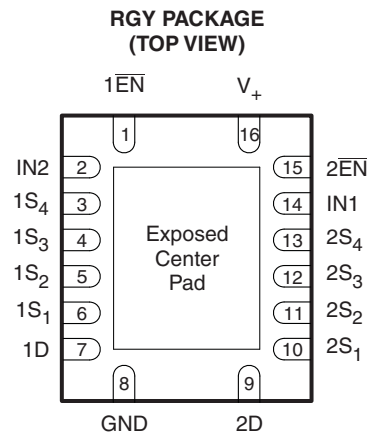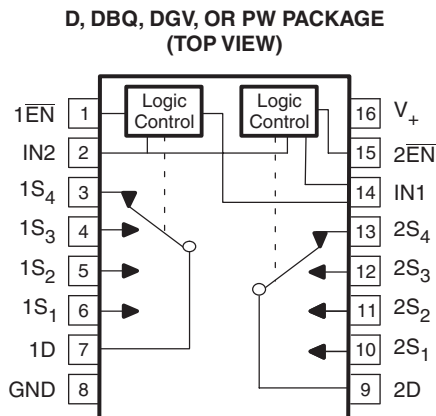

If exposed center pad is used, it must be connected as a secondary ground or left electrically open.

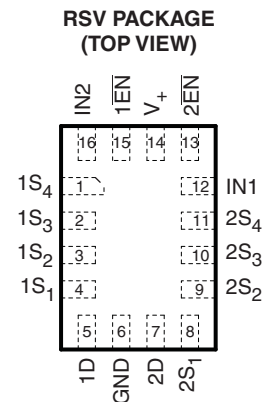

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

**ORDERING INFORMATION**

| $T_A$         | PACKAGE <sup>(1)(2)</sup> |               | ORDERABLE PART NUMBER | TOP-SIDE MARKING |
|---------------|---------------------------|---------------|-----------------------|------------------|
| –40°C to 85°C | μQFN – RSV                | Tape and reel | TS3A5017RSVR          | ZVL              |
|               | QFN – RGY                 | Tape and reel | TS3A5017RGYR          | YA017            |
|               | SOIC – D                  | Tube          | TS3A5017D             | TS3A5017         |
|               |                           | Tape and reel | TS3A5017DR            |                  |
|               | SSOP (QSOP) – DBQ         | Tape and reel | TS3A5017DBQR          | YA017            |
|               | TSSOP – PW                | Tube          | TS3A5017PW            | YA017            |
|               |                           | Tape and reel | TS3A5017PWR           |                  |
|               | TVSOP – DGV               | Tape and reel | TS3A5017DGVR          | YA017            |

(1) Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).

(2) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at [www.ti.com](http://www.ti.com).

**SUMMARY OF CHARACTERISTICS**

$V_+ = 3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$

| Configuration                                   | Dual Analog<br>Multiplexer/Demultiplexer<br>(4:1 Mux/Demux) |
|-------------------------------------------------|-------------------------------------------------------------|
| Number of channels                              | 2                                                           |
| ON-state resistance ( $r_{on}$ )                | 11 $\Omega$                                                 |
| ON-state resistance match ( $\Delta r_{on}$ )   | 1 $\Omega$                                                  |
| ON-state resistance flatness ( $r_{on(flat)}$ ) | 7 $\Omega$                                                  |
| Turn-on/turn-off time ( $t_{ON}/t_{OFF}$ )      | 5 ns/1.5 ns                                                 |
| Charge injection ( $Q_C$ )                      | 5 pC                                                        |
| Bandwidth (BW)                                  | 165 MHz                                                     |
| OFF isolation ( $O_{ISO}$ )                     | –48 dB at 10 MHz                                            |
| Crosstalk ( $X_{TALK}$ )                        | –49 dB at 10 MHz                                            |
| Total harmonic distortion (THD)                 | 0.21%                                                       |
| Leakage current ( $I_{D(OFF)}/I_{S(OFF)}$ )     | $\pm 0.1\text{ }\mu\text{A}$                                |
| Power-supply current ( $I_+$ )                  | 2.5 $\mu\text{A}$                                           |
| Package options                                 | 16-pin QFN, μQFN, SOIC, SSOP, TSSOP, or TVSOP               |

## ABSOLUTE MINIMUM AND MAXIMUM RATINGS<sup>(1)(2)</sup>

over operating free-air temperature range (unless otherwise noted)

|                                      |                                               |                                            | MIN  | MAX | UNIT |
|--------------------------------------|-----------------------------------------------|--------------------------------------------|------|-----|------|
| V <sub>+</sub>                       | Supply voltage <sup>(3)</sup>                 |                                            | −0.5 | 4.6 | V    |
| V <sub>S</sub> , V <sub>D</sub>      | Analog voltage <sup>(3) (4)</sup>             |                                            | −0.5 | 4.6 | V    |
| I <sub>SK</sub> ,<br>I <sub>DK</sub> | Analog port clamp current                     | V <sub>S</sub> , V <sub>D</sub> < 0        | −50  |     | mA   |
| I <sub>S</sub> , I <sub>D</sub>      | On-state switch current                       | V <sub>S</sub> , V <sub>D</sub> = 0 to 7 V | −128 | 128 | mA   |
| V <sub>I</sub>                       | Digital input voltage                         |                                            | −0.5 | 4.6 | V    |
| I <sub>IK</sub>                      | Digital input clamp current <sup>(3)(4)</sup> | V <sub>I</sub> < 0                         | −50  |     | mA   |
| I <sub>+</sub>                       | Continuous current through V <sub>+</sub>     |                                            |      | 100 | mA   |
| I <sub>GND</sub>                     | Continuous current through GND                |                                            | −100 |     | mA   |
| T <sub>stg</sub>                     | Storage temperature                           |                                            | −65  | 150 | °C   |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.
- (3) All voltages are with respect to ground, unless otherwise specified.
- (4) The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

## PACKAGE THERMAL IMPEDANCE

|               |             | UNIT |
|---------------|-------------|------|
| $\theta_{JA}$ | D package   | 73   |
|               | DB package  | 82   |
|               | DGV package | 120  |
|               | DW package  | 108  |
|               | RGY package | 91.6 |
|               | RSV package | 184  |

- (1) The package thermal impedance is calculated in accordance with JESD 51-7.

**ELECTRICAL CHARACTERISTICS FOR 3.3-V SUPPLY<sup>(1)</sup>**
 $V_+ = 2.7\text{ V to }3.6\text{ V}$ ,  $T_A = -40^\circ\text{C to }85^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                                                                 | SYMBOL                            | TEST CONDITIONS                                                                                    |                                              | T <sub>A</sub> | V <sub>+</sub> | MIN  | TYP  | MAX            | UNIT |
|---------------------------------------------------------------------------|-----------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------|----------------|----------------|------|------|----------------|------|
| Analog Switch                                                             |                                   |                                                                                                    |                                              |                |                |      |      |                |      |
| Analog signal range                                                       | V <sub>D</sub> , V <sub>S</sub>   |                                                                                                    |                                              |                |                | 0    |      | V <sub>+</sub> | V    |
| ON-state resistance                                                       | r <sub>on</sub>                   | 0 ≤ V <sub>S</sub> ≤ V <sub>+</sub> ,<br>I <sub>D</sub> = −32 mA,                                  | Switch ON,<br>See <a href="#">Figure 13</a>  | 25°C           | 3 V            | 11   |      | 12             | Ω    |
|                                                                           |                                   |                                                                                                    |                                              | Full           |                |      |      | 14             |      |
| ON-state resistance match between channels                                | Δr <sub>on</sub>                  | V <sub>S</sub> = 2.1 V,<br>I <sub>D</sub> = −32 mA,                                                | Switch ON,<br>See <a href="#">Figure 13</a>  | 25°C           | 3 V            | 1    |      | 2              | Ω    |
|                                                                           |                                   |                                                                                                    |                                              | Full           |                |      |      | 3              |      |
| ON-state resistance flatness                                              | r <sub>on(flat)</sub>             | 0 ≤ V <sub>S</sub> ≤ V <sub>+</sub> ,<br>I <sub>D</sub> = −32 mA,                                  | Switch ON,<br>See <a href="#">Figure 13</a>  | 25°C           | 3 V            | 7    |      | 9              | Ω    |
|                                                                           |                                   |                                                                                                    |                                              | Full           |                |      |      | 10             |      |
| S<br>OFF leakage current                                                  | I <sub>S(OFF)</sub>               | V <sub>S</sub> = 1 V, V <sub>D</sub> = 3 V,<br>or<br>V <sub>S</sub> = 3 V, V <sub>D</sub> = 1 V,   | Switch OFF,<br>See <a href="#">Figure 14</a> | 25°C           | 3.6 V          | −0.1 | 0.05 | 0.1            | μA   |
|                                                                           |                                   |                                                                                                    |                                              | Full           |                | −0.2 |      | 0.2            |      |
|                                                                           | I <sub>SPWR(OFF)</sub>            | V <sub>S</sub> = 0 to 3.6 V,<br>V <sub>D</sub> = 3.6 V to 0,                                       |                                              | 25°C           | 0 V            | −1   | 0.5  | 1              |      |
|                                                                           |                                   |                                                                                                    |                                              | Full           |                | −5   |      | 5              |      |
| D<br>OFF leakage current                                                  | I <sub>D(OFF)</sub>               | V <sub>S</sub> = 1 V, V <sub>D</sub> = 3 V,<br>or<br>V <sub>S</sub> = 3 V, V <sub>D</sub> = 1 V,   | Switch OFF,<br>See <a href="#">Figure 14</a> | 25°C           | 3.6 V          | −0.1 | 0.05 | 0.1            | μA   |
|                                                                           |                                   |                                                                                                    |                                              | Full           |                | −0.2 |      | 0.2            |      |
|                                                                           | I <sub>DPWR(OFF)</sub>            | V <sub>D</sub> = 0 to 3.6 V,<br>V <sub>S</sub> = 3.6 V to 0,                                       |                                              | 25°C           | 0 V            | −1   | 0.5  | 1              |      |
|                                                                           |                                   |                                                                                                    |                                              | Full           |                | −5   |      | 5              |      |
| S<br>ON leakage current                                                   | I <sub>S(ON)</sub>                | V <sub>S</sub> = 1 V, V <sub>D</sub> = Open,<br>or<br>V <sub>S</sub> = 3 V, V <sub>D</sub> = Open, | Switch ON,<br>See <a href="#">Figure 15</a>  | 25°C           | 3.6 V          | −0.1 | 0.05 | 0.1            | μA   |
|                                                                           |                                   |                                                                                                    |                                              | Full           |                | −0.2 |      | 0.2            |      |
| D<br>ON leakage current                                                   | I <sub>D(ON)</sub>                | V <sub>D</sub> = 1 V, V <sub>S</sub> = Open,<br>or<br>V <sub>D</sub> = 3 V, V <sub>S</sub> = Open, | Switch ON,<br>See <a href="#">Figure 15</a>  | 25°C           | 3.6 V          | −0.1 | 0.05 | 0.1            | μA   |
|                                                                           |                                   |                                                                                                    |                                              | Full           |                | −0.2 |      | 0.2            |      |
| Digital Control Inputs (IN1, IN2, $\overline{\text{EN}}$ ) <sup>(2)</sup> |                                   |                                                                                                    |                                              |                |                |      |      |                |      |
| Input logic high                                                          | V <sub>IH</sub>                   |                                                                                                    |                                              | Full           |                | 2    |      | V <sub>+</sub> | V    |
| Input logic low                                                           | V <sub>IL</sub>                   |                                                                                                    |                                              | Full           |                | 0    |      | 0.8            | V    |
| Input leakage current                                                     | I <sub>IH</sub> , I <sub>IL</sub> | V <sub>I</sub> = V <sub>+</sub> or 0                                                               |                                              | 25°C           | 3.6 V          | −1   | 0.05 | 1              | μA   |
|                                                                           |                                   |                                                                                                    |                                              | Full           |                | −1   |      | 1              |      |

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum

(2) All unused digital inputs of the device must be held at  $V_+$  or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

**ELECTRICAL CHARACTERISTICS FOR 3.3-V SUPPLY (continued)**
 $V_+ = 2.7\text{ V to }3.6\text{ V}$ ,  $T_A = -40^\circ\text{C to }85^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                    | SYMBOL                 | TEST CONDITIONS                                                         |                                                          | T <sub>A</sub> | V <sub>+</sub> | MIN | TYP  | MAX  | UNIT |
|------------------------------|------------------------|-------------------------------------------------------------------------|----------------------------------------------------------|----------------|----------------|-----|------|------|------|
| Dynamic                      |                        |                                                                         |                                                          |                |                |     |      |      |      |
| Turn-on time                 | t <sub>ON</sub>        | V <sub>D</sub> = 2 V,<br>R <sub>L</sub> = 300 Ω,                        | C <sub>L</sub> = 35 pF,<br>See <a href="#">Figure 17</a> | 25°C           | 3.3 V          | 1   | 5    | 9.5  | ns   |
|                              |                        |                                                                         |                                                          | Full           | 3 V to 3.6 V   | 1   |      | 10.5 |      |
| Turn-off time                | t <sub>OFF</sub>       | V <sub>D</sub> = 2 V,<br>R <sub>L</sub> = 300 Ω,                        | C <sub>L</sub> = 35 pF,<br>See <a href="#">Figure 17</a> | 25°C           | 3.3 V          | 0.5 | 1.5  | 3.5  | ns   |
|                              |                        |                                                                         |                                                          | Full           | 3 V to 3.6 V   | 0.5 |      | 4.5  |      |
| Charge injection             | Q <sub>C</sub>         | V <sub>GEN</sub> = 0, R <sub>GEN</sub> = 0,<br>C <sub>L</sub> = 0.1 nF, | See <a href="#">Figure 22</a>                            | 25°C           | 3.3 V          |     | 5    |      | pC   |
| S<br>OFF<br>capacitance      | C <sub>S(OFF)</sub>    | V <sub>S</sub> = V <sub>+</sub> or GND,<br>Switch OFF,                  | See <a href="#">Figure 16</a>                            | 25°C           | 3.3 V          |     | 4.5  |      | pF   |
| D<br>OFF<br>capacitance      | C <sub>D(OFF)</sub>    | V <sub>D</sub> = V <sub>+</sub> or GND,<br>Switch OFF,                  | See <a href="#">Figure 16</a>                            | 25°C           | 3.3 V          |     | 19   |      | pF   |
| S<br>ON capacitance          | C <sub>S(ON)</sub>     | V <sub>S</sub> = V <sub>+</sub> or GND,<br>Switch ON,                   | See <a href="#">Figure 16</a>                            | 25°C           | 3.3 V          |     | 25   |      | pF   |
| D<br>ON capacitance          | C <sub>D(ON)</sub>     | V <sub>D</sub> = V <sub>+</sub> or GND,<br>Switch ON,                   | See <a href="#">Figure 16</a>                            | 25°C           | 3.3 V          |     | 25   |      | pF   |
| Digital input<br>capacitance | C <sub>I</sub>         | V <sub>I</sub> = V <sub>+</sub> or GND,                                 | See <a href="#">Figure 16</a>                            | 25°C           | 3.3 V          |     | 2    |      | pF   |
| Bandwidth                    | BW                     | R <sub>L</sub> = 50 Ω,<br>Switch ON,                                    | See <a href="#">Figure 18</a>                            | 25°C           | 3.3 V          |     | 165  |      | MHz  |
| OFF isolation                | O <sub>ISO</sub>       | R <sub>L</sub> = 50 Ω,<br>f = 1 MHz,                                    | See <a href="#">Figure 19</a>                            | 25°C           | 3.3 V          |     | −48  |      | dB   |
| Crosstalk                    | X <sub>TALK</sub>      | R <sub>L</sub> = 50 Ω,<br>f = 1 MHz,                                    | See <a href="#">Figure 20</a>                            | 25°C           | 3.3 V          |     | −49  |      | dB   |
| Crosstalk<br>adjacent        | X <sub>TALK(ADJ)</sub> | R <sub>L</sub> = 50 Ω,<br>f = 1 MHz,                                    | See <a href="#">Figure 21</a>                            | 25°C           | 3.3 V          |     | −74  |      | dB   |
| Total harmonic<br>distortion | THD                    | R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 50 pF,                      | f = 20 Hz to 20 kHz,<br>See <a href="#">Figure 23</a>    | 25°C           | 3.3 V          |     | 0.21 |      | %    |
| Supply                       |                        |                                                                         |                                                          |                |                |     |      |      |      |
| Positive supply<br>current   | I <sub>+</sub>         | V <sub>I</sub> = V <sub>+</sub> or GND,                                 | Switch ON or OFF                                         | 25°C           | 3.6 V          |     | 2.5  | 7    | μA   |
|                              |                        |                                                                         |                                                          | Full           |                |     |      | 10   |      |

**ELECTRICAL CHARACTERISTICS FOR 2.5-V SUPPLY<sup>(1)</sup>**
 $V_+ = 2.3 \text{ V to } 2.7 \text{ V}$ ,  $T_A = -40^\circ\text{C to } 85^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                                            | SYMBOL                            | TEST CONDITIONS                                                                                                                                                                                        |                                              | T <sub>A</sub> | V <sub>+</sub> | MIN          | TYP  | MAX            | UNIT |
|------------------------------------------------------|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|----------------|----------------|--------------|------|----------------|------|
| Analog Switch                                        |                                   |                                                                                                                                                                                                        |                                              |                |                |              |      |                |      |
| Analog signal range                                  | V <sub>D</sub> , V <sub>S</sub>   |                                                                                                                                                                                                        |                                              |                |                | 0            |      | V <sub>+</sub> | V    |
| ON-state resistance                                  | r <sub>on</sub>                   | 0 ≤ V <sub>S</sub> ≤ V <sub>+</sub> ,<br>I <sub>D</sub> = −24 mA,                                                                                                                                      | Switch ON,<br>See <a href="#">Figure 13</a>  | 25°C<br>Full   | 2.3 V          | 20.5         |      | 22<br>24       | Ω    |
| ON-state resistance match between channels           | Δr <sub>on</sub>                  | V <sub>S</sub> = 1.6 V,<br>I <sub>D</sub> = −24 mA,                                                                                                                                                    | Switch ON,<br>See <a href="#">Figure 13</a>  | 25°C<br>Full   | 2.3 V          | 1            |      | 2<br>3         | Ω    |
| ON-state resistance flatness                         | r <sub>on(flat)</sub>             | 0 ≤ V <sub>S</sub> ≤ V <sub>+</sub> ,<br>I <sub>D</sub> = −24 mA,                                                                                                                                      | Switch ON,<br>See <a href="#">Figure 13</a>  | 25°C<br>Full   | 2.3 V          | 16           |      | 18<br>20       | Ω    |
| S<br>OFF leakage current                             | I <sub>S(OFF)</sub>               | V <sub>S</sub> = 0.5 V, V <sub>D</sub> = 2.2 V,<br>or<br>V <sub>S</sub> = 2.2 V, V <sub>D</sub> = 0.5 V,<br><br>I <sub>SPWR(OFF)</sub><br>V <sub>S</sub> = 0 to 2.7 V,<br>V <sub>D</sub> = 2.7 V to 0, | Switch OFF,<br>See <a href="#">Figure 14</a> | 25°C           | 2.7 V          | −0.1         | 0.05 | 0.1            | μA   |
|                                                      |                                   |                                                                                                                                                                                                        |                                              | Full           |                | −0.2         |      | 0.2            |      |
|                                                      | I <sub>SPWR(OFF)</sub>            |                                                                                                                                                                                                        |                                              | 25°C           | 0 V            | −1           | 0.5  | 1              |      |
|                                                      |                                   |                                                                                                                                                                                                        |                                              | Full           |                | −5           |      | 5              |      |
| D<br>OFF leakage current                             | I <sub>D(OFF)</sub>               | V <sub>S</sub> = 0.5 V, V <sub>D</sub> = 2.2 V,<br>or<br>V <sub>S</sub> = 2.2 V, V <sub>D</sub> = 0.5V,<br><br>I <sub>DPWR(OFF)</sub><br>V <sub>D</sub> = 0 to 2.7 V,<br>V <sub>S</sub> = 2.7 V to 0,  | Switch OFF,<br>See <a href="#">Figure 14</a> | 25°C           | 2.7 V          | −0.1         | 0.05 | 0.1            | μA   |
|                                                      |                                   |                                                                                                                                                                                                        |                                              | Full           |                | −0.2         |      | 0.2            |      |
|                                                      | I <sub>DPWR(OFF)</sub>            |                                                                                                                                                                                                        |                                              | 25°C           | 0 V            | −1           | 0.5  | 1              |      |
|                                                      |                                   |                                                                                                                                                                                                        |                                              | Full           |                | −5           |      | 5              |      |
| S<br>ON leakage current                              | I <sub>S(ON)</sub>                | V <sub>S</sub> = 0.5 V, V <sub>D</sub> = Open,<br>or<br>V <sub>S</sub> = 2.2 V, V <sub>D</sub> = Open,                                                                                                 | Switch ON,<br>See <a href="#">Figure 15</a>  | 25°C<br>Full   | 2.7 V          | −0.1<br>−0.2 | 0.05 | 0.1<br>0.2     | μA   |
| D<br>ON leakage current                              | I <sub>D(ON)</sub>                | V <sub>D</sub> = 0.5 V, V <sub>S</sub> = Open,<br>or<br>V <sub>D</sub> = 2.2 V, V <sub>S</sub> = Open,                                                                                                 | Switch ON,<br>See <a href="#">Figure 15</a>  | 25°C<br>Full   | 2.7 V          | −0.1<br>−0.2 | 0.05 | 0.1<br>0.2     | μA   |
| Digital Control Inputs (IN1, IN2, EN) <sup>(2)</sup> |                                   |                                                                                                                                                                                                        |                                              |                |                |              |      |                |      |
| Input logic high                                     | V <sub>IH</sub>                   |                                                                                                                                                                                                        |                                              | Full           |                | 1.7          |      | V <sub>+</sub> | V    |
| Input logic low                                      | V <sub>IL</sub>                   |                                                                                                                                                                                                        |                                              | Full           |                | 0            |      | 0.7            | V    |
| Input leakage current                                | I <sub>IH</sub> , I <sub>IL</sub> | V <sub>I</sub> = V <sub>+</sub> or 0                                                                                                                                                                   |                                              | 25°C<br>Full   | 2.7 V          | −1<br>−1     | 0.05 | 1<br>1         | μA   |







(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum

(2) All unused digital inputs of the device must be held at  $V_+$  or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

**ELECTRICAL CHARACTERISTICS FOR 2.5-V SUPPLY (continued)**
 $V_+ = 2.3 \text{ V to } 2.7 \text{ V}$ ,  $T_A = -40^\circ\text{C to } 85^\circ\text{C}$  (unless otherwise noted)

| PARAMETER                    | SYMBOL          | TEST CONDITIONS                                                                                                              | $T_A$ | $V_+$             | MIN | TYP  | MAX | UNIT          |
|------------------------------|-----------------|------------------------------------------------------------------------------------------------------------------------------|-------|-------------------|-----|------|-----|---------------|
| <b>Dynamic</b>               |                 |                                                                                                                              |       |                   |     |      |     |               |
| Turn-on time                 | $t_{ON}$        | $V_D = 2 \text{ V}$ ,<br>$R_L = 300 \Omega$ ,<br>$C_L = 35 \text{ pF}$ ,<br>See <a href="#">Figure 17</a>                    | 25°C  | 2.5 V             | 1.5 | 5    | 8   | ns            |
|                              |                 |                                                                                                                              | Full  | 2.3 V to<br>2.7 V | 1   |      | 10  |               |
| Turn-off time                | $t_{OFF}$       | $V_D = 2 \text{ V}$ ,<br>$R_L = 300 \Omega$ ,<br>$C_L = 35 \text{ pF}$ ,<br>See <a href="#">Figure 17</a>                    | 25°C  | 2.5 V             | 0.3 | 2    | 4.5 | ns            |
|                              |                 |                                                                                                                              | Full  | 2.3 V to<br>2.7 V | 0.3 |      | 6   |               |
| Charge injection             | $Q_C$           | $V_{GEN} = 0$ , $R_{GEN} = 0$ ,<br>$C_L = 0.1 \text{ nF}$ ,<br>See <a href="#">Figure 22</a>                                 | 25°C  | 2.5 V             |     |      |     | pC            |
| S<br>OFF capacitance         | $C_{S(OFF)}$    | $V_S = V_+$ or GND,<br>Switch OFF,<br>See <a href="#">Figure 16</a>                                                          | 25°C  | 2.5 V             |     | 4.5  |     | pF            |
| D<br>OFF capacitance         | $C_{D(OFF)}$    | $V_D = V_+$ or GND,<br>Switch OFF,<br>See <a href="#">Figure 16</a>                                                          | 25°C  | 2.5 V             |     | 18.5 |     | pF            |
| S<br>ON capacitance          | $C_{S(ON)}$     | $V_S = V_+$ or GND,<br>Switch ON,<br>See <a href="#">Figure 16</a>                                                           | 25°C  | 2.5 V             |     | 24   |     | pF            |
| D<br>ON capacitance          | $C_{D(ON)}$     | $V_D = V_+$ or GND,<br>Switch ON,<br>See <a href="#">Figure 16</a>                                                           | 25°C  | 2.5 V             |     | 24   |     | pF            |
| Digital input<br>capacitance | $C_I$           | $V_I = V_+$ or GND,<br>See <a href="#">Figure 16</a>                                                                         | 25°C  | 2.5 V             |     | 2    |     | pF            |
| Bandwidth                    | BW              | $R_L = 50 \Omega$ ,<br>Switch ON,<br>See <a href="#">Figure 18</a>                                                           | 25°C  | 2.5 V             |     | 165  |     | MHz           |
| OFF isolation                | $O_{ISO}$       | $R_L = 50 \Omega$ ,<br>$f = 1 \text{ MHz}$ ,<br>See <a href="#">Figure 19</a>                                                | 25°C  | 2.5 V             |     | –48  |     | dB            |
| Crosstalk                    | $X_{TALK}$      | $R_L = 50 \Omega$ ,<br>$f = 1 \text{ MHz}$ ,<br>See <a href="#">Figure 20</a>                                                | 25°C  | 2.5 V             |     | –49  |     | dB            |
| Crosstalk adjacent           | $X_{TALK(ADJ)}$ | $R_L = 50 \Omega$ ,<br>$f = 1 \text{ MHz}$ ,<br>See <a href="#">Figure 21</a>                                                | 25°C  | 2.5 V             |     | –74  |     | dB            |
| Total harmonic<br>distortion | THD             | $R_L = 600 \Omega$ ,<br>$C_L = 50 \text{ pF}$ ,<br>$f = 20 \text{ Hz to } 20 \text{ kHz}$ ,<br>See <a href="#">Figure 23</a> | 25°C  | 2.5 V             |     | 0.29 |     | %             |
| <b>Supply</b>                |                 |                                                                                                                              |       |                   |     |      |     |               |
| Positive supply<br>current   | $I_+$           | $V_I = V_+$ or GND,<br>Switch ON or OFF                                                                                      | 25°C  | 2.7 V             |     | 2.5  | 7   | $\mu\text{A}$ |
|                              |                 |                                                                                                                              | Full  |                   |     |      | 10  |               |

## TYPICAL PERFORMANCE

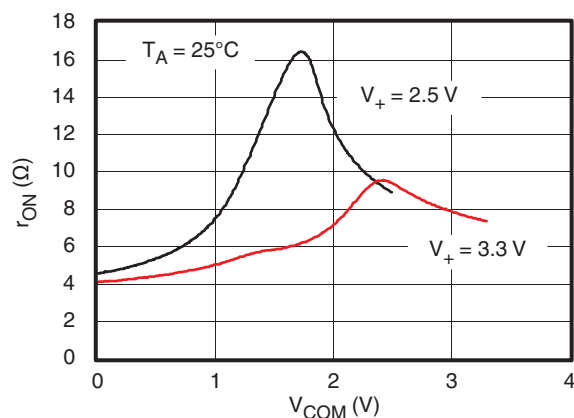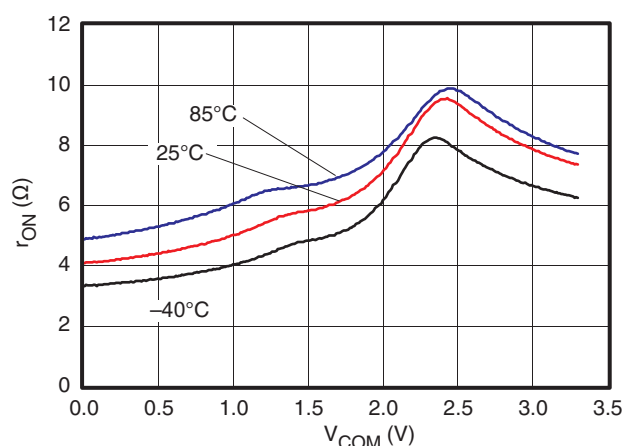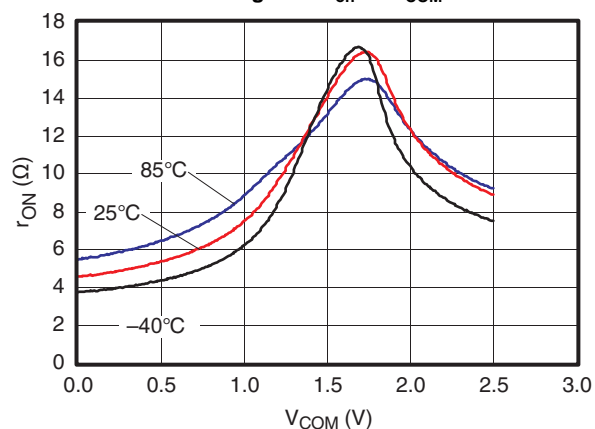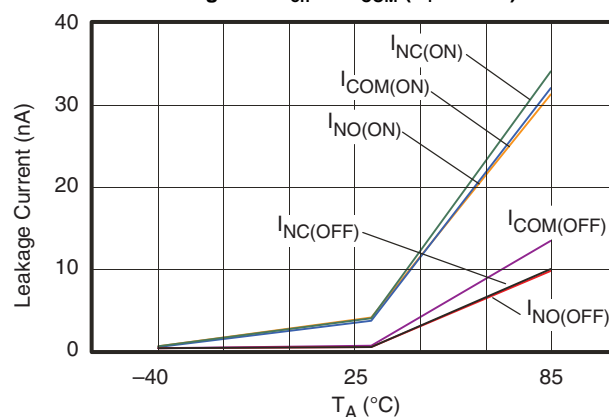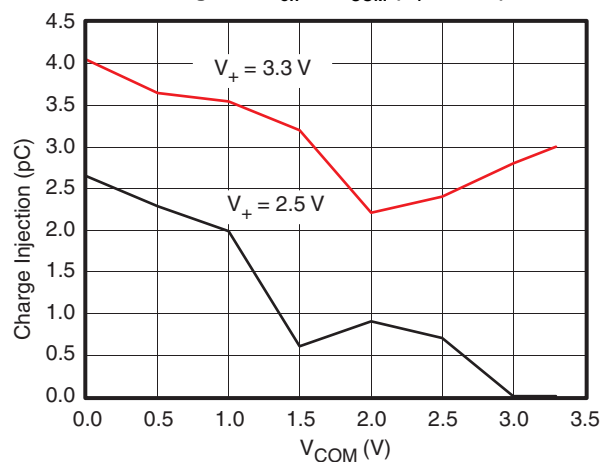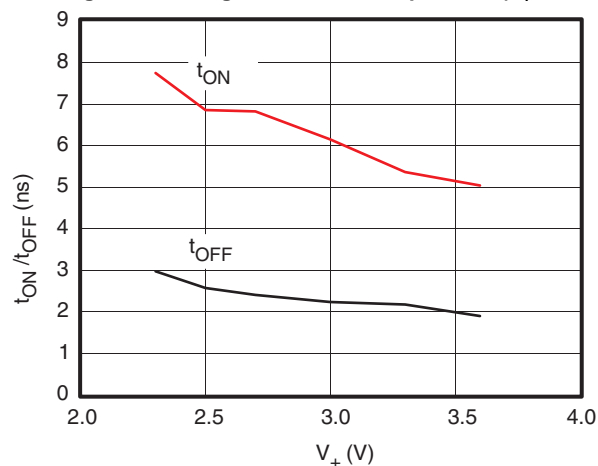Figure 1.  $r_{ON}$  vs  $V_{COM}$ Figure 2.  $r_{ON}$  vs  $V_{COM}$  ( $V_+ = 3.3\text{ V}$ )Figure 3.  $r_{ON}$  vs  $V_{COM}$  ( $V_+ = 2.5\text{ V}$ )Figure 4. Leakage Current vs Temperature ( $V_+ = 3.6\text{ V}$ )Figure 5. Charge Injection ( $Q_C$ ) vs  $V_{COM}$ Figure 6.  $t_{ON}$  and  $t_{OFF}$  vs Supply Voltage



## TYPICAL PERFORMANCE (continued)

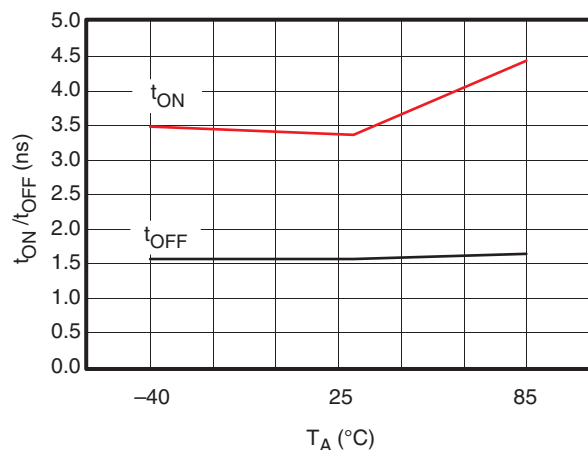


Figure 7.  $t_{ON}$  and  $t_{OFF}$  vs Temperature ( $V_+ = 3.3$  V)

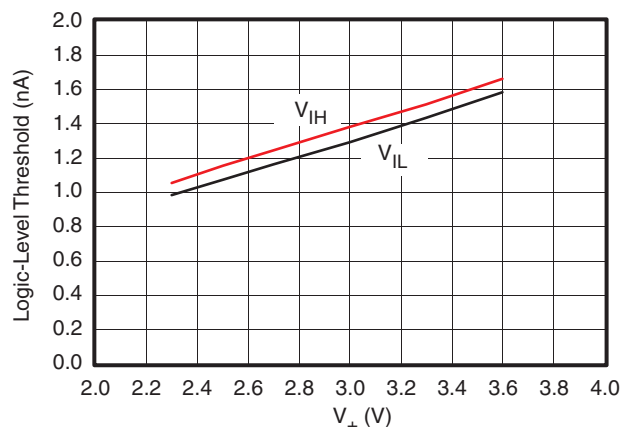


Figure 8. Logic-Level Threshold vs  $V_+$

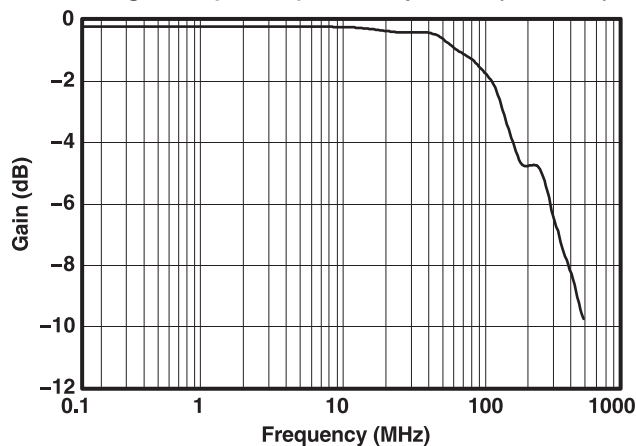


Figure 9. Bandwidth (Gain vs Frequency) ( $V_+ = 3.3$  V)

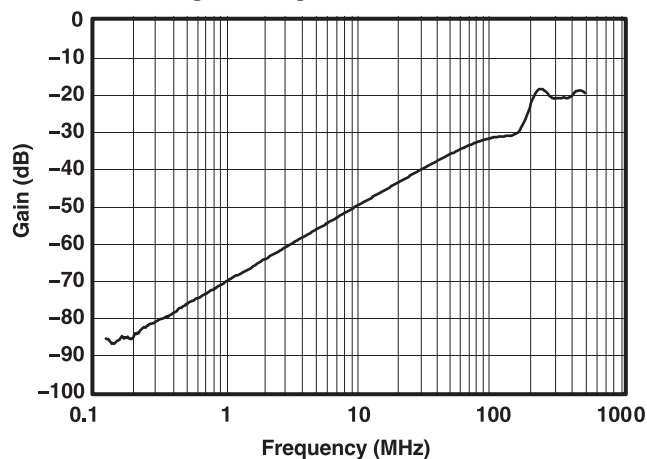


Figure 10. OFF Isolation and Crosstalk vs Frequency ( $V_+ = 3.3$  V)

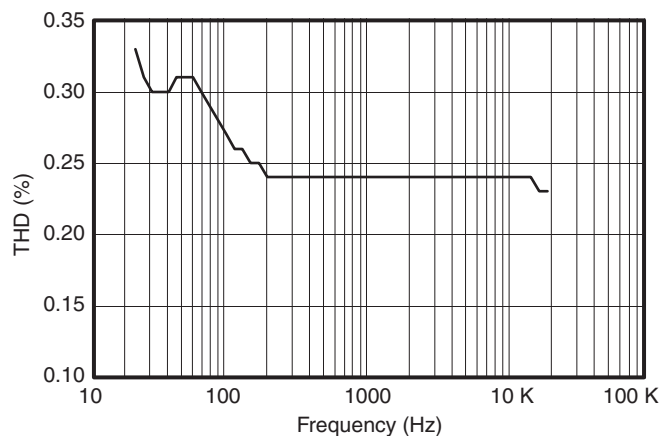


Figure 11. Total Harmonic Distortion vs Frequency

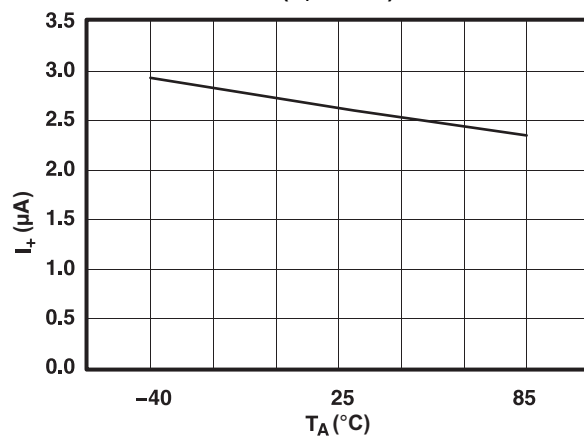


Figure 12. Power-Supply Current vs Temperature ( $V_+ = 3.6$  V)


## PIN DESCRIPTION

| PIN NO. | NAME             | DESCRIPTION                       |
|---------|------------------|-----------------------------------|
| 1       | $1\overline{EN}$ | Enable (active low)               |
| 2       | IN2              | Digital control to connect D to S |
| 3       | $1S_4$           | Analog I/O                        |
| 4       | $1S_3$           | Analog I/O                        |
| 5       | $1S_2$           | Analog I/O                        |
| 6       | $1S_1$           | Analog I/O                        |
| 7       | 1D               | Common                            |
| 8       | GND              | Ground                            |
| 9       | 2D               | Common                            |
| 10      | $2S_1$           | Analog I/O                        |
| 11      | $2S_2$           | Analog I/O                        |
| 12      | $2S_3$           | Analog I/O                        |
| 13      | $2S_4$           | Analog I/O                        |
| 14      | IN1              | Digital control to connect D to S |
| 15      | $2\overline{EN}$ | Enable (active low)               |
| 16      | $V_+$            | Power supply                      |


## PARAMETER DESCRIPTION

| SYMBOL           | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                       |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $V_D$            | Voltage at D                                                                                                                                                                                                                                                                                                                                                                      |
| $V_{NC}$         | Voltage at S                                                                                                                                                                                                                                                                                                                                                                      |
| $r_{on}$         | Resistance between D and S ports when the channel is ON                                                                                                                                                                                                                                                                                                                           |
| $\Delta r_{on}$  | Difference of $r_{on}$ between channels in a specific device                                                                                                                                                                                                                                                                                                                      |
| $r_{on(Flat)}$   | Difference between the maximum and minimum value of $r_{on}$ in a channel over the specified range of conditions                                                                                                                                                                                                                                                                  |
| $I_{S(OFF)}$     | Leakage current measured at the S port, with the corresponding channel (S to D) in the OFF state                                                                                                                                                                                                                                                                                  |
| $I_{SPWR(OFF)}$  | Leakage current measured at the S port under the powered down mode, $V_+ = 0$                                                                                                                                                                                                                                                                                                     |
| $I_{S(ON)}$      | Leakage current measured at the S port, with the corresponding channel (S to D) in the ON state and the output (D) open                                                                                                                                                                                                                                                           |
| $I_{D(OFF)}$     | Leakage current measured at the D port, with the corresponding channel (D to S) in the OFF state                                                                                                                                                                                                                                                                                  |
| $I_{DPWR(OFF)}$  | Leakage current measured at the D port under the powered down mode, $V_+ = 0$                                                                                                                                                                                                                                                                                                     |
| $I_{D(ON)}$      | Leakage current measured at the D port, with the corresponding channel (D to S) in the ON state and the output (S) open                                                                                                                                                                                                                                                           |
| $V_{IH}$         | Minimum input voltage for logic high for the control input (IN, $\overline{EN}$ )                                                                                                                                                                                                                                                                                                 |
| $V_{IL}$         | Maximum input voltage for logic low for the control input (IN, $\overline{EN}$ )                                                                                                                                                                                                                                                                                                  |
| $V_I$            | Voltage at the control input (IN, $\overline{EN}$ )                                                                                                                                                                                                                                                                                                                               |
| $I_{IH}, I_{IL}$ | Leakage current measured at the control input (IN, $\overline{EN}$ )                                                                                                                                                                                                                                                                                                              |
| $t_{ON}$         | Turn-on time for the switch. This parameter is measured under the specified range of conditions and by the propagation delay between the digital control (IN) signal and analog output (D or S) signal when the switch is turning ON.                                                                                                                                             |
| $t_{OFF}$        | Turn-off time for the switch. This parameter is measured under the specified range of conditions and by the propagation delay between the digital control (IN) signal and analog output (D or S) signal when the switch is turning OFF.                                                                                                                                           |
| $Q_C$            | Charge injection is a measurement of unwanted signal coupling from the control (IN) input to the analog (S or D) output. This is measured in coulomb (C) and measured by the total charge induced due to switching of the control input. Charge injection, $Q_C = C_L \times \Delta V_D$ , $C_L$ is the load capacitance and $\Delta V_D$ is the change in analog output voltage. |
| $C_{S(OFF)}$     | Capacitance at the S port when the corresponding channel (S to D) is OFF                                                                                                                                                                                                                                                                                                          |
| $C_{S(ON)}$      | Capacitance at the S port when the corresponding channel (S to D) is ON                                                                                                                                                                                                                                                                                                           |
| $C_{D(OFF)}$     | Capacitance at the D port when the corresponding channel (D to S) is OFF                                                                                                                                                                                                                                                                                                          |
| $C_{D(ON)}$      | Capacitance at the D port when the corresponding channel (D to S) is ON                                                                                                                                                                                                                                                                                                           |
| $C_I$            | Capacitance of control input (IN)                                                                                                                                                                                                                                                                                                                                                 |
| $O_{ISO}$        | OFF isolation of the switch is a measurement of OFF-state switch impedance. This is measured in dB in a specific frequency, with the corresponding channel (S to D) in the OFF state.                                                                                                                                                                                             |
| $X_{TALK}$       | Crosstalk is a measurement of unwanted signal coupling from an ON channel to an OFF channel (1S <sub>1</sub> to 2S <sub>1</sub> ). This is measured in a specific frequency and in dB.                                                                                                                                                                                            |
| BW               | Bandwidth of the switch. This is the frequency in which the gain of an ON channel is –3 dB below the DC gain.                                                                                                                                                                                                                                                                     |
| THD              | Total harmonic distortion describes the signal distortion caused by the analog switch. This is defined as the ratio of root mean square (RMS) value of the second, third, and higher harmonic to the absolute magnitude of the fundamental harmonic.                                                                                                                              |
| $I_+$            | Static power-supply current with the control (IN) pin at $V_+$ or GND                                                                                                                                                                                                                                                                                                             |


## PARAMETER MEASUREMENT INFORMATION

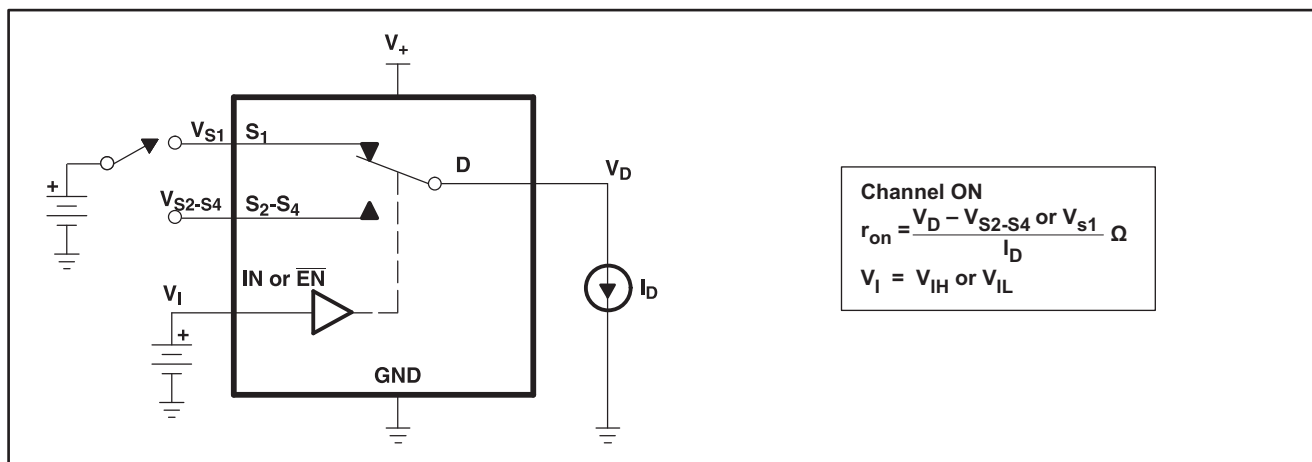

**Figure 13. ON-State Resistance ( $r_{on}$ )**

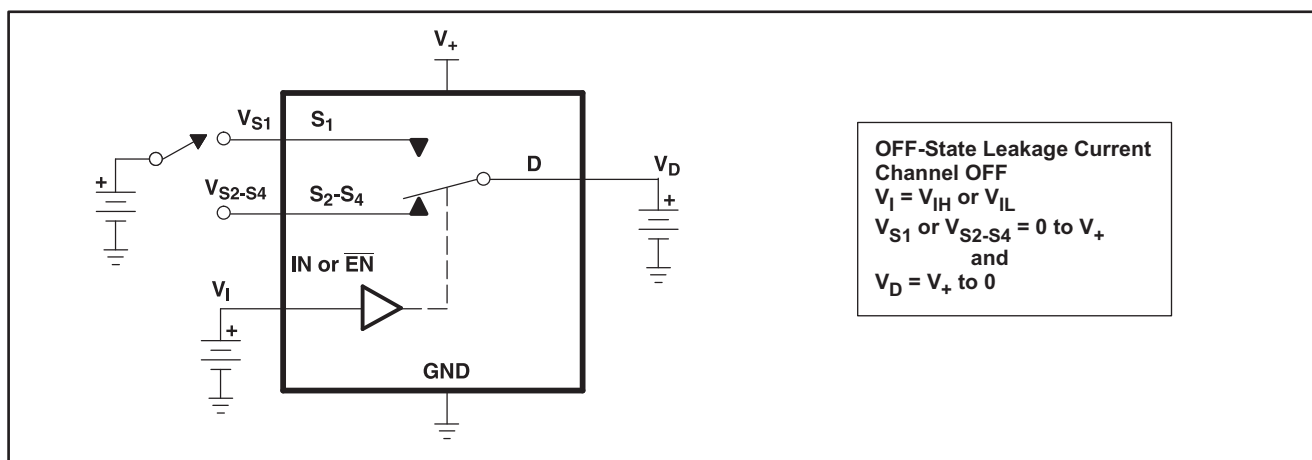


**Figure 14. OFF-State Leakage Current ( $I_{D(OFF)}$ ,  $I_{S(OFF)}$ )**

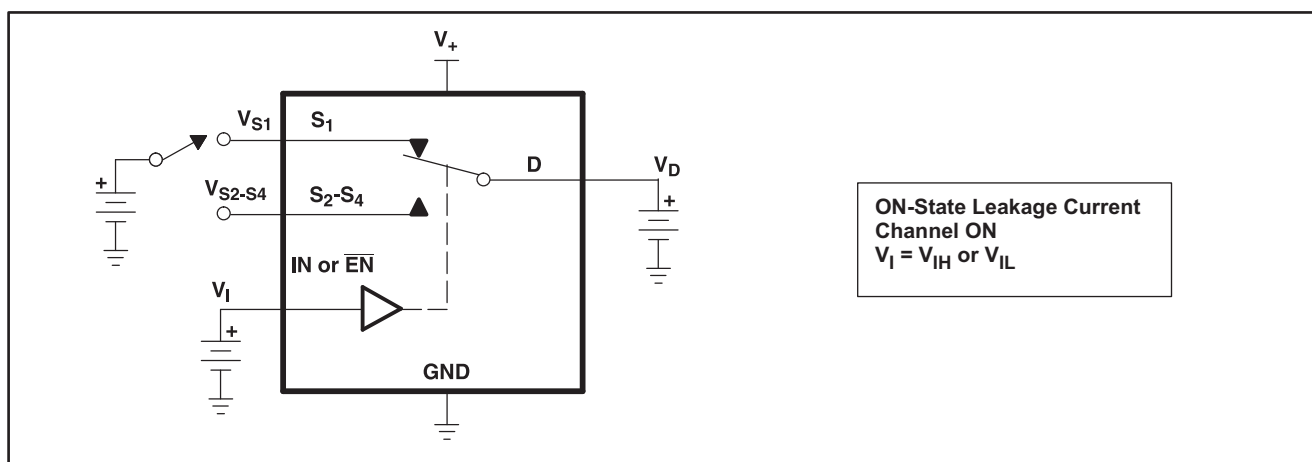


**Figure 15. ON-State Leakage Current ( $I_{D(ON)}$ ,  $I_{S(ON)}$ )**

### PARAMETER MEASUREMENT INFORMATION (continued)

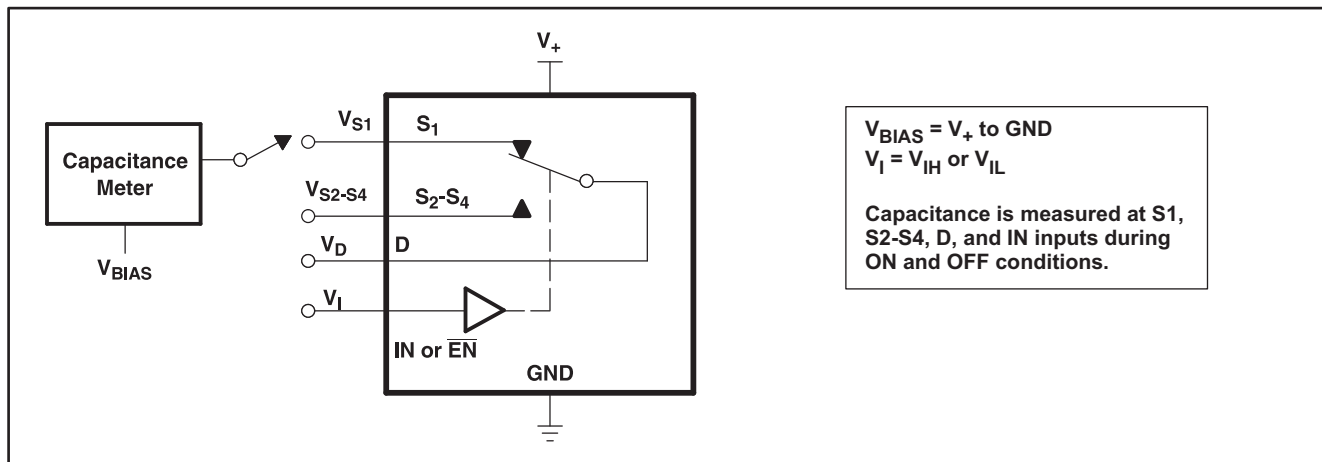

**Figure 16. Capacitance ( $C_I$ ,  $C_{D(OFF)}$ ,  $C_{D(ON)}$ ,  $C_{S(OFF)}$ ,  $C_{S(ON)}$ )**

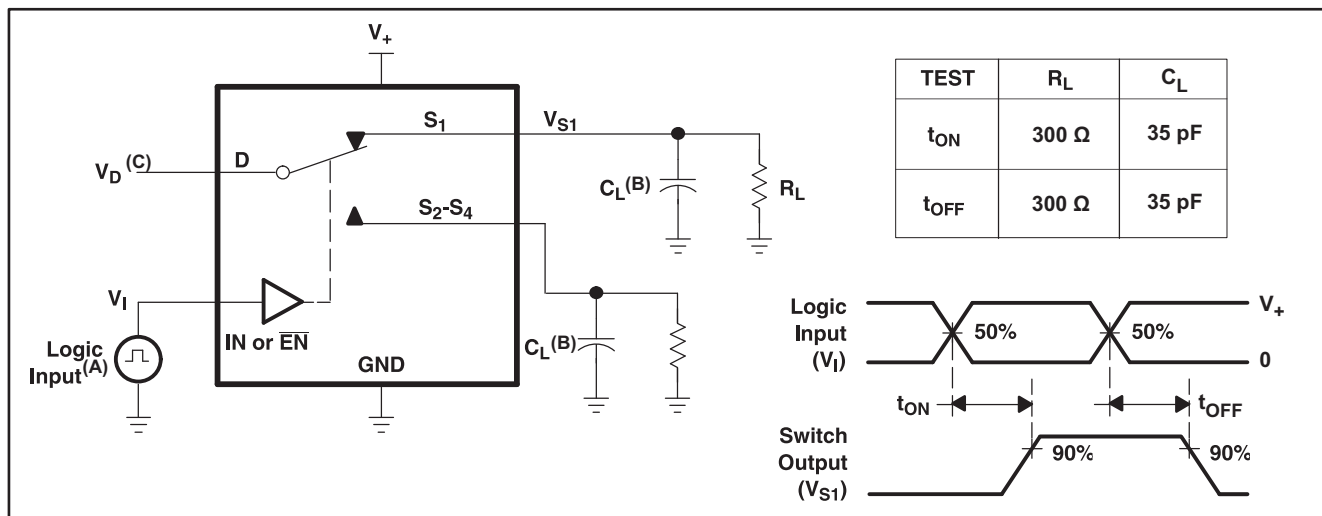

- A. All input pulses are supplied by generators having the following characteristics:  $\text{PRR} \leq 10 \text{ MHz}$ ,  $Z_O = 50 \text{ } \Omega$ ,  $t_r < 5 \text{ ns}$ ,  $t_f < 5 \text{ ns}$ .
- B.  $C_L$  includes probe and jig capacitance.
- C. See Electrical Characteristics for  $V_D$ .

**Figure 17. Turn-On ( $t_{ON}$ ) and Turn-Off Time ( $t_{OFF}$ )**

## PARAMETER MEASUREMENT INFORMATION (continued)




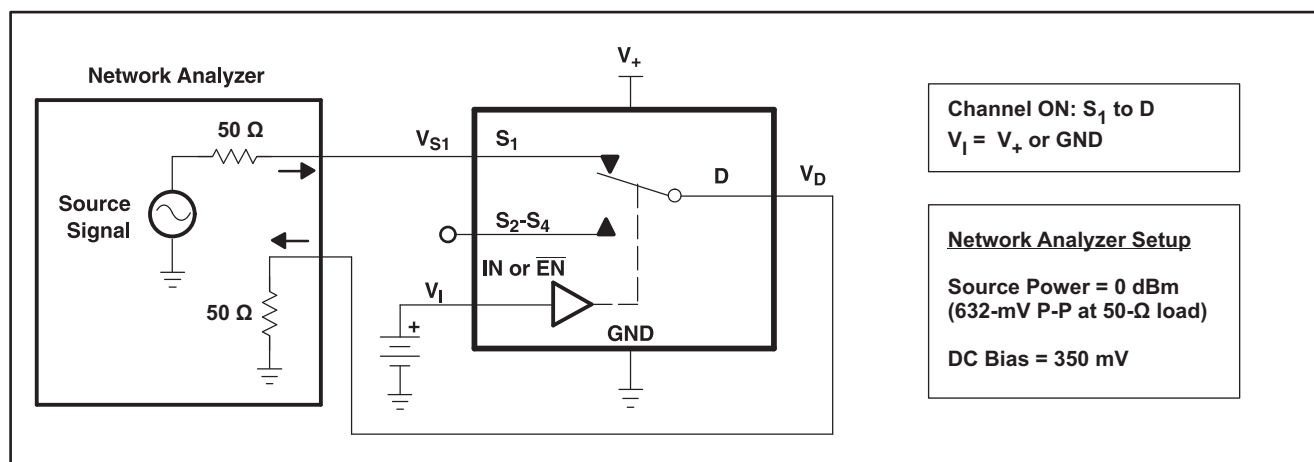



Figure 18. Bandwidth (BW)

Figure 19. OFF Isolation ( $O_{ISO}$ )Figure 20. Crosstalk ( $X_{TALK}$ )

## PARAMETER MEASUREMENT INFORMATION (continued)

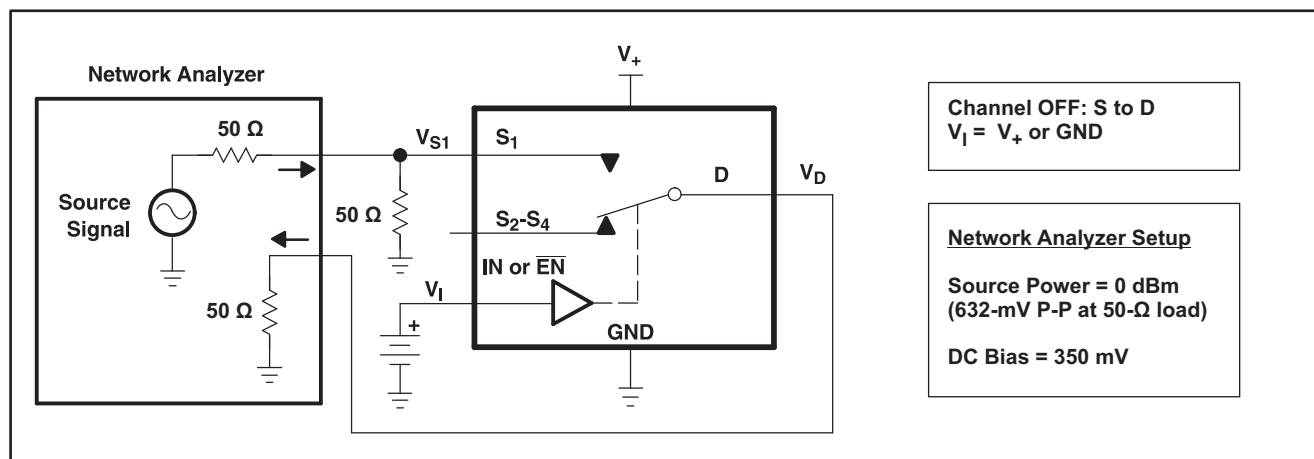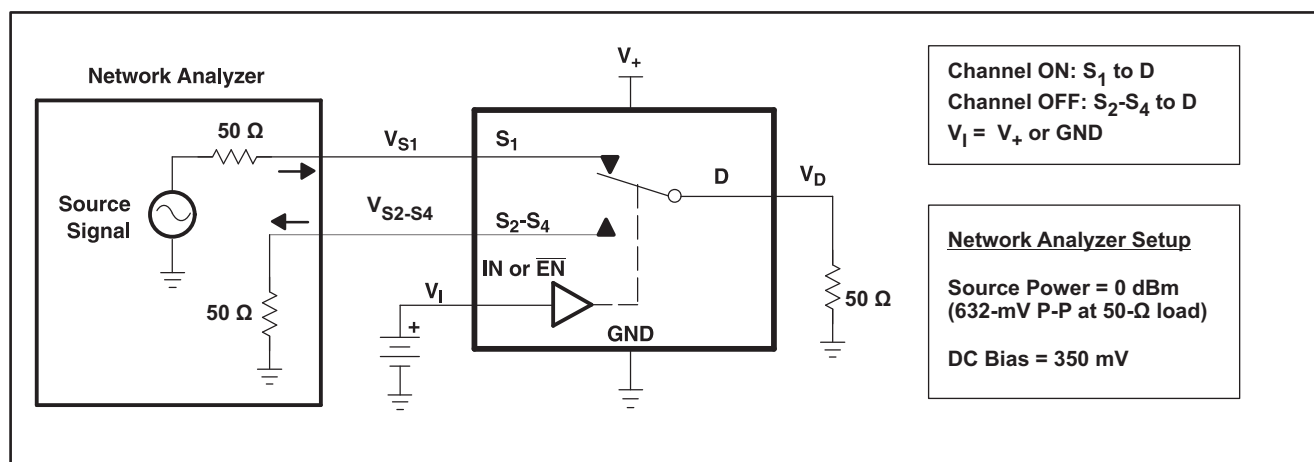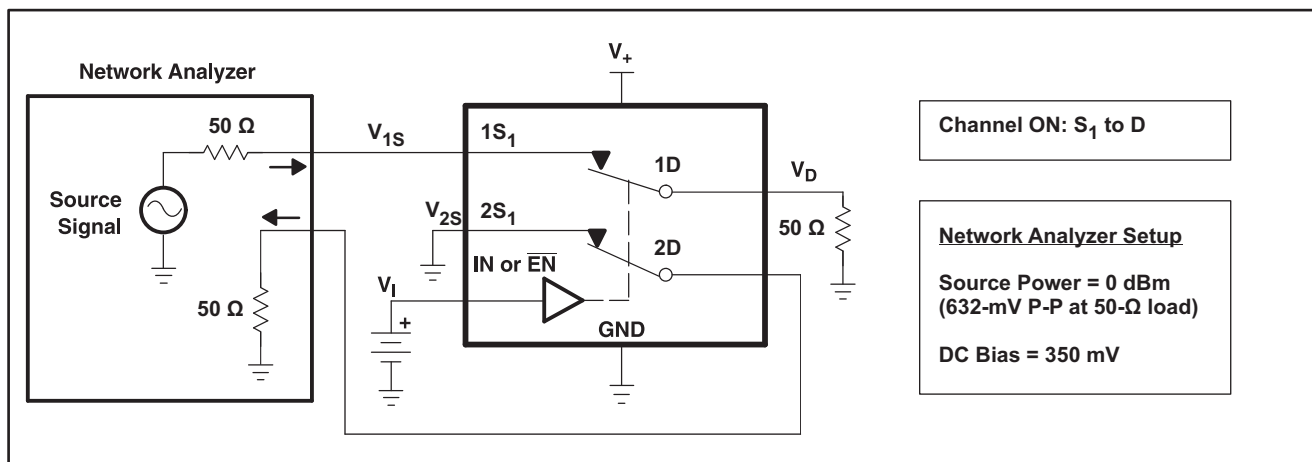


**Figure 21. Adjacent Crosstalk ( $X_{TALK}$ )**

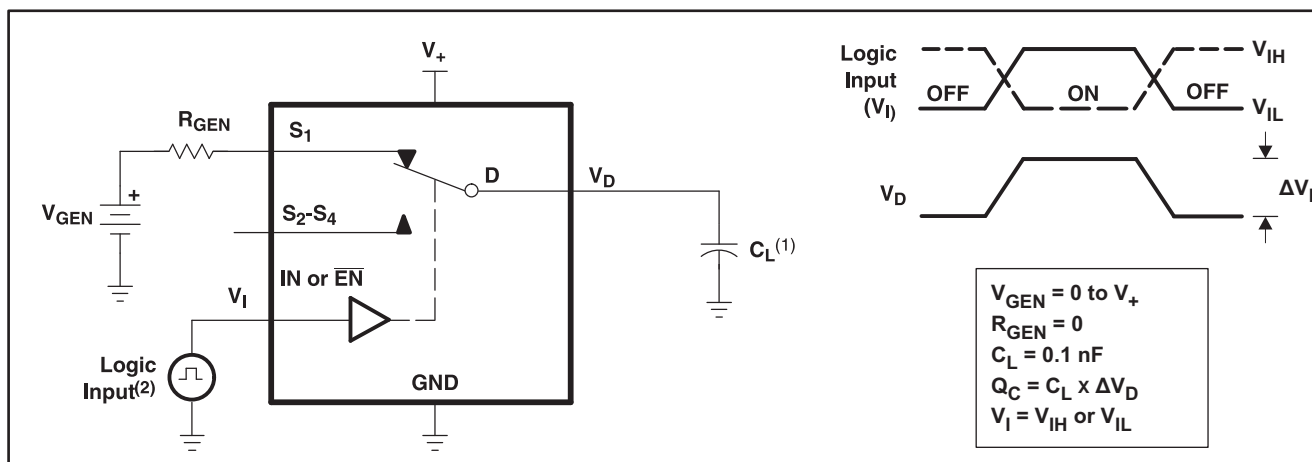

- All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10 \text{ MHz}$ ,  $Z_O = 50 \Omega$ ,  $t_r < 5 \text{ ns}$ ,  $t_f < 5 \text{ ns}$ .
- $C_L$  includes probe and jig capacitance.

**Figure 22. Charge Injection ( $Q_C$ )**

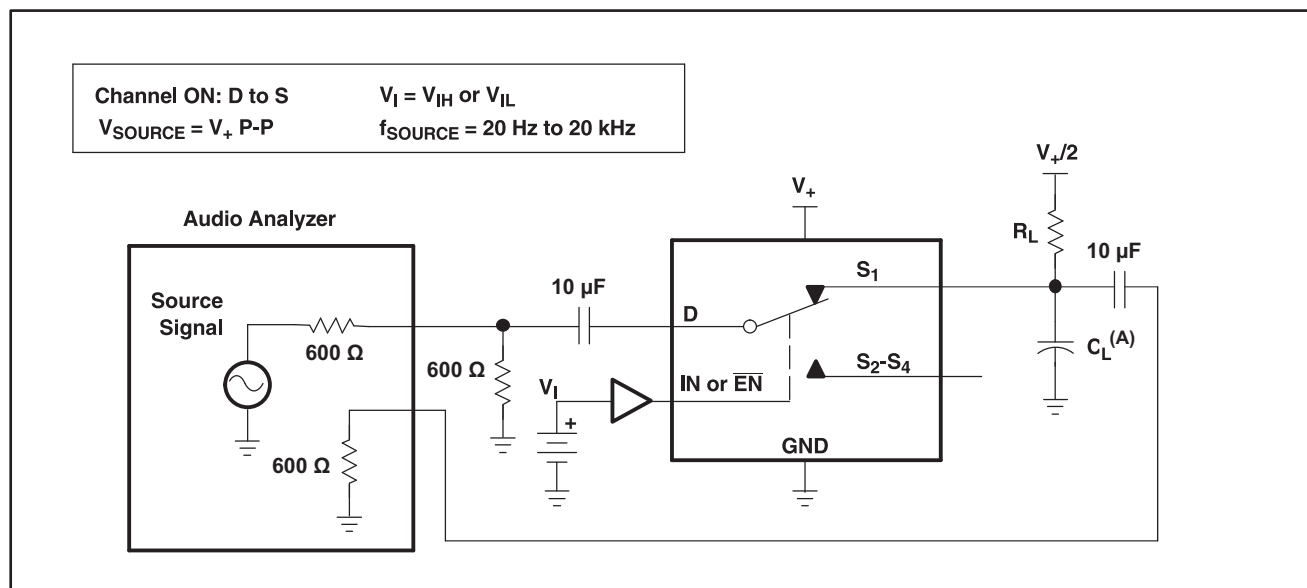**PARAMETER MEASUREMENT INFORMATION (continued)**

A.  $C_L$  includes probe and jig capacitance.

**Figure 23. Total Harmonic Distortion (THD)**



**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| TS3A5017D        | ACTIVE        | SOIC         | D                  | 16   | 40          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TS3A5017                 | <a href="#">Samples</a> |
| TS3A5017DBQR     | ACTIVE        | SSOP         | DBQ                | 16   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR  | -40 to 85    | YA017                    | <a href="#">Samples</a> |
| TS3A5017DBQRE4   | ACTIVE        | SSOP         | DBQ                | 16   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR  | -40 to 85    | YA017                    | <a href="#">Samples</a> |
| TS3A5017DBQRG4   | ACTIVE        | SSOP         | DBQ                | 16   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR  | -40 to 85    | YA017                    | <a href="#">Samples</a> |
| TS3A5017DE4      | ACTIVE        | SOIC         | D                  | 16   | 40          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TS3A5017                 | <a href="#">Samples</a> |
| TS3A5017DG4      | ACTIVE        | SOIC         | D                  | 16   | 40          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TS3A5017                 | <a href="#">Samples</a> |
| TS3A5017DGVR     | ACTIVE        | TVSOP        | DGV                | 16   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | YA017                    | <a href="#">Samples</a> |
| TS3A5017DGVRE4   | ACTIVE        | TVSOP        | DGV                | 16   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | YA017                    | <a href="#">Samples</a> |
| TS3A5017DGVRG4   | ACTIVE        | TVSOP        | DGV                | 16   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | YA017                    | <a href="#">Samples</a> |
| TS3A5017DR       | ACTIVE        | SOIC         | D                  | 16   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TS3A5017                 | <a href="#">Samples</a> |
| TS3A5017DRE4     | ACTIVE        | SOIC         | D                  | 16   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TS3A5017                 | <a href="#">Samples</a> |
| TS3A5017DRG4     | ACTIVE        | SOIC         | D                  | 16   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TS3A5017                 | <a href="#">Samples</a> |
| TS3A5017PW       | ACTIVE        | TSSOP        | PW                 | 16   | 90          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | YA017                    | <a href="#">Samples</a> |
| TS3A5017PWE4     | ACTIVE        | TSSOP        | PW                 | 16   | 90          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | YA017                    | <a href="#">Samples</a> |
| TS3A5017PWG4     | ACTIVE        | TSSOP        | PW                 | 16   | 90          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | YA017                    | <a href="#">Samples</a> |
| TS3A5017PWR      | ACTIVE        | TSSOP        | PW                 | 16   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | YA017                    | <a href="#">Samples</a> |
| TS3A5017PWRE4    | ACTIVE        | TSSOP        | PW                 | 16   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | YA017                    | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| TS3A5017PWRG4    | ACTIVE        | TSSOP        | PW                 | 16   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | YA017                    | <a href="#">Samples</a> |
| TS3A5017RGYR     | ACTIVE        | VQFN         | RGY                | 16   | 3000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR  | -40 to 85    | YA017                    | <a href="#">Samples</a> |
| TS3A5017RGYRG4   | ACTIVE        | VQFN         | RGY                | 16   | 3000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR  | -40 to 85    | YA017                    | <a href="#">Samples</a> |
| TS3A5017RSV      | PREVIEW       | UQFN         | RSV                | 16   |             | TBD                        | Call TI          | Call TI              | -40 to 85    |                          |                         |
| TS3A5017RSVR     | ACTIVE        | UQFN         | RSV                | 16   | 3000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | ZVL                      | <a href="#">Samples</a> |
| TS3A5017RSVRG4   | ACTIVE        | UQFN         | RSV                | 16   | 3000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | ZVL                      | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Only one of markings shown within the brackets will appear on the physical device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

---

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**


|    |                                                           |
|----|-----------------------------------------------------------|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TS3A5017DGVR | TVSOP        | DGV             | 16   | 2000 | 330.0              | 12.4               | 6.8     | 4.0     | 1.6     | 8.0     | 12.0   | Q1            |
| TS3A5017DR   | SOIC         | D               | 16   | 2500 | 330.0              | 16.4               | 6.5     | 10.3    | 2.1     | 8.0     | 16.0   | Q1            |
| TS3A5017PWR  | TSSOP        | PW              | 16   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TS3A5017RGYR | VQFN         | RGY             | 16   | 3000 | 330.0              | 12.4               | 3.8     | 4.3     | 1.5     | 8.0     | 12.0   | Q1            |
| TS3A5017RSVR | UQFN         | RSV             | 16   | 3000 | 180.0              | 12.4               | 2.1     | 2.9     | 0.75    | 4.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TS3A5017DGVR | TVSOP        | DGV             | 16   | 2000 | 367.0       | 367.0      | 35.0        |
| TS3A5017DR   | SOIC         | D               | 16   | 2500 | 333.2       | 345.9      | 28.6        |
| TS3A5017PWR  | TSSOP        | PW              | 16   | 2000 | 367.0       | 367.0      | 35.0        |
| TS3A5017RGYR | VQFN         | RGY             | 16   | 3000 | 367.0       | 367.0      | 35.0        |
| TS3A5017RSVR | UQFN         | RSV             | 16   | 3000 | 203.0       | 203.0      | 35.0        |

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - $\triangle C$  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
  - $\triangle D$  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
  - E. Reference JEDEC MS-012 variation AC.

PW (R-PDSO-G16)

PLASTIC SMALL OUTLINE



4040064-4/G 02/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153

PW (R-PDSO-G16)

PLASTIC SMALL OUTLINE



4211284-3/F 12/12

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



RGY (R-PVQFN-N16)

PLASTIC QUAD FLATPACK NO-LEAD



4203539-3/I 06/2011

- NOTES:
- All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - This drawing is subject to change without notice.
  - QFN (Quad Flatpack No-Lead) package configuration.
  - The package thermal pad must be soldered to the board for thermal and mechanical performance.
  - See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
- F** Pin 1 identifiers are located on both top and bottom of the package and within the zone indicated. The Pin 1 identifiers are either a molded, marked, or metal feature.
- Package complies to JEDEC MO-241 variation BA.

RGY (R-PVQFN-N16)


PLASTIC QUAD FLATPACK NO-LEAD

## THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

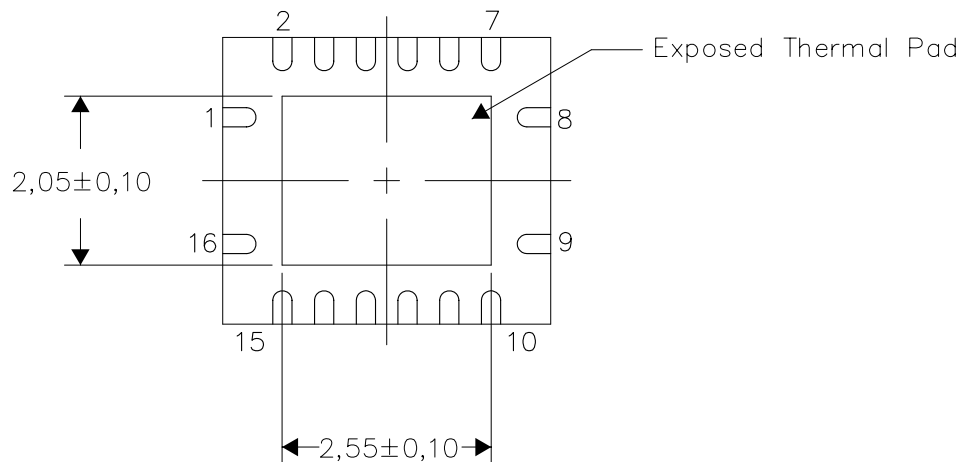

Bottom View


Exposed Thermal Pad Dimensions

4206353-3/0 11/11

NOTE: All linear dimensions are in millimeters

RGY (R-PVQFN-N16)


PLASTIC QUAD FLATPACK NO-LEAD

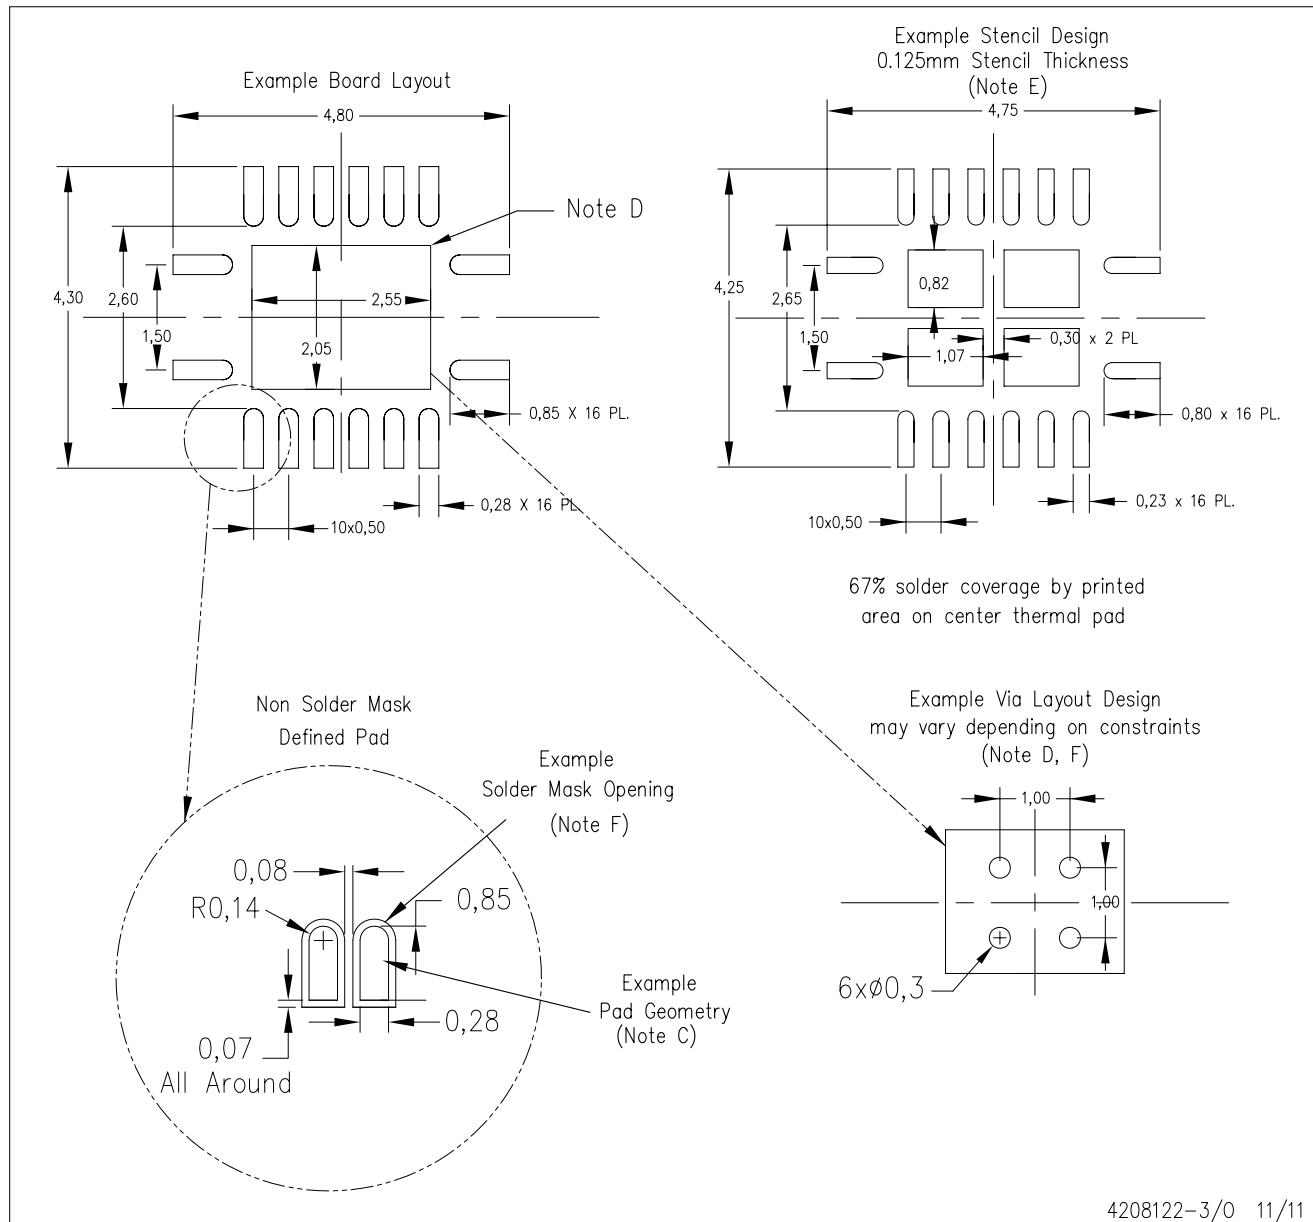

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.

RSV (R-PUQFN-N16)

PLASTIC QUAD FLATPACK NO-LEAD

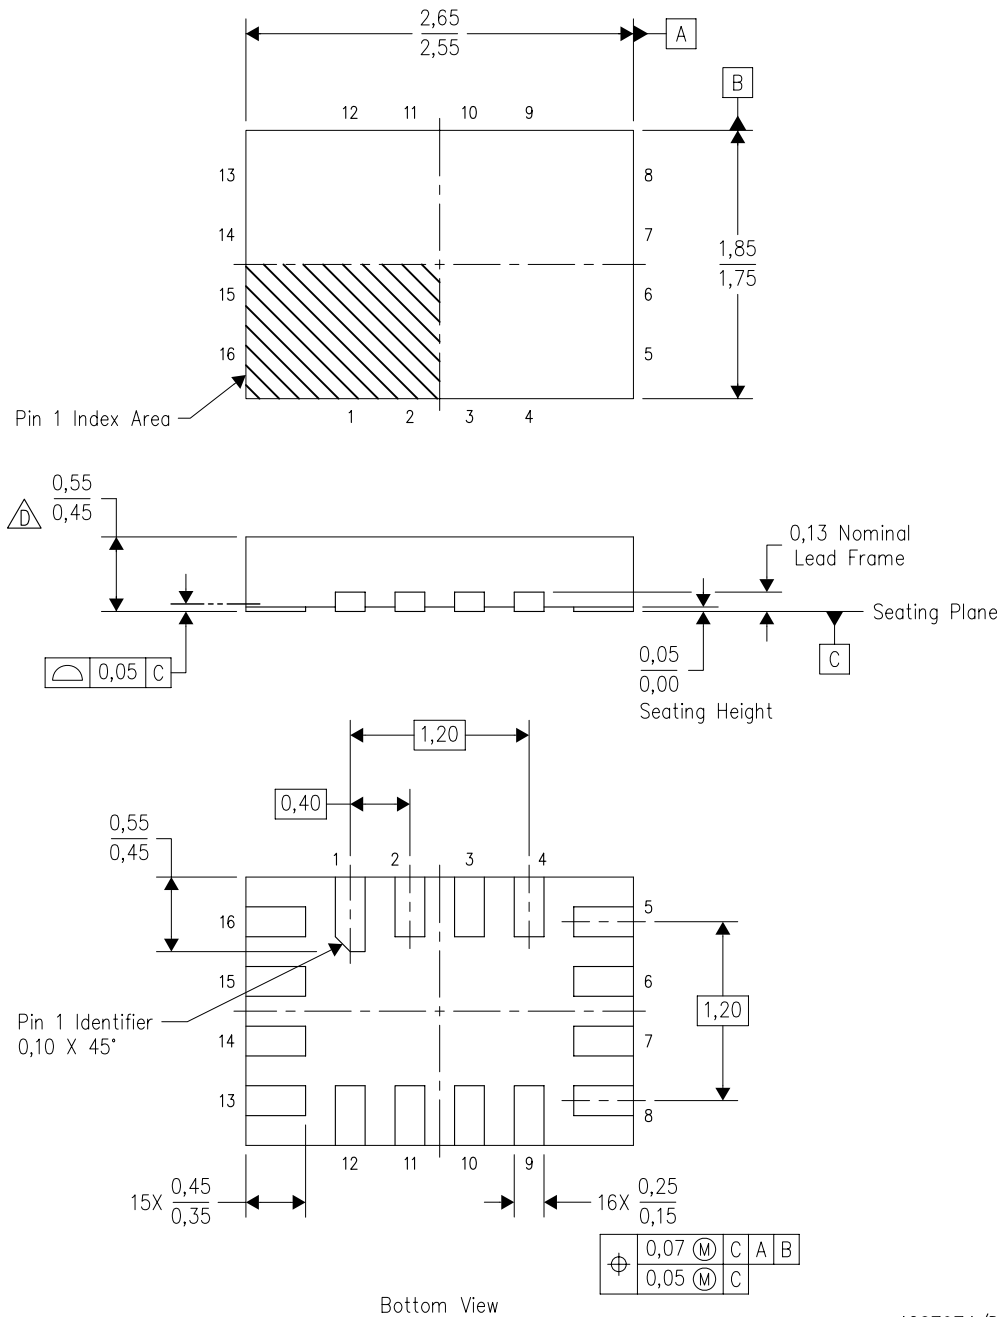


4207974/D 12/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. QFN (Quad Flatpack No-Lead) package configuration.
  - This package complies to JEDEC MO-288 variation UFHE, except minimum package thickness.

RSV (R-PUQFN-N16)


PLASTIC QUAD FLATPACK NO-LEAD

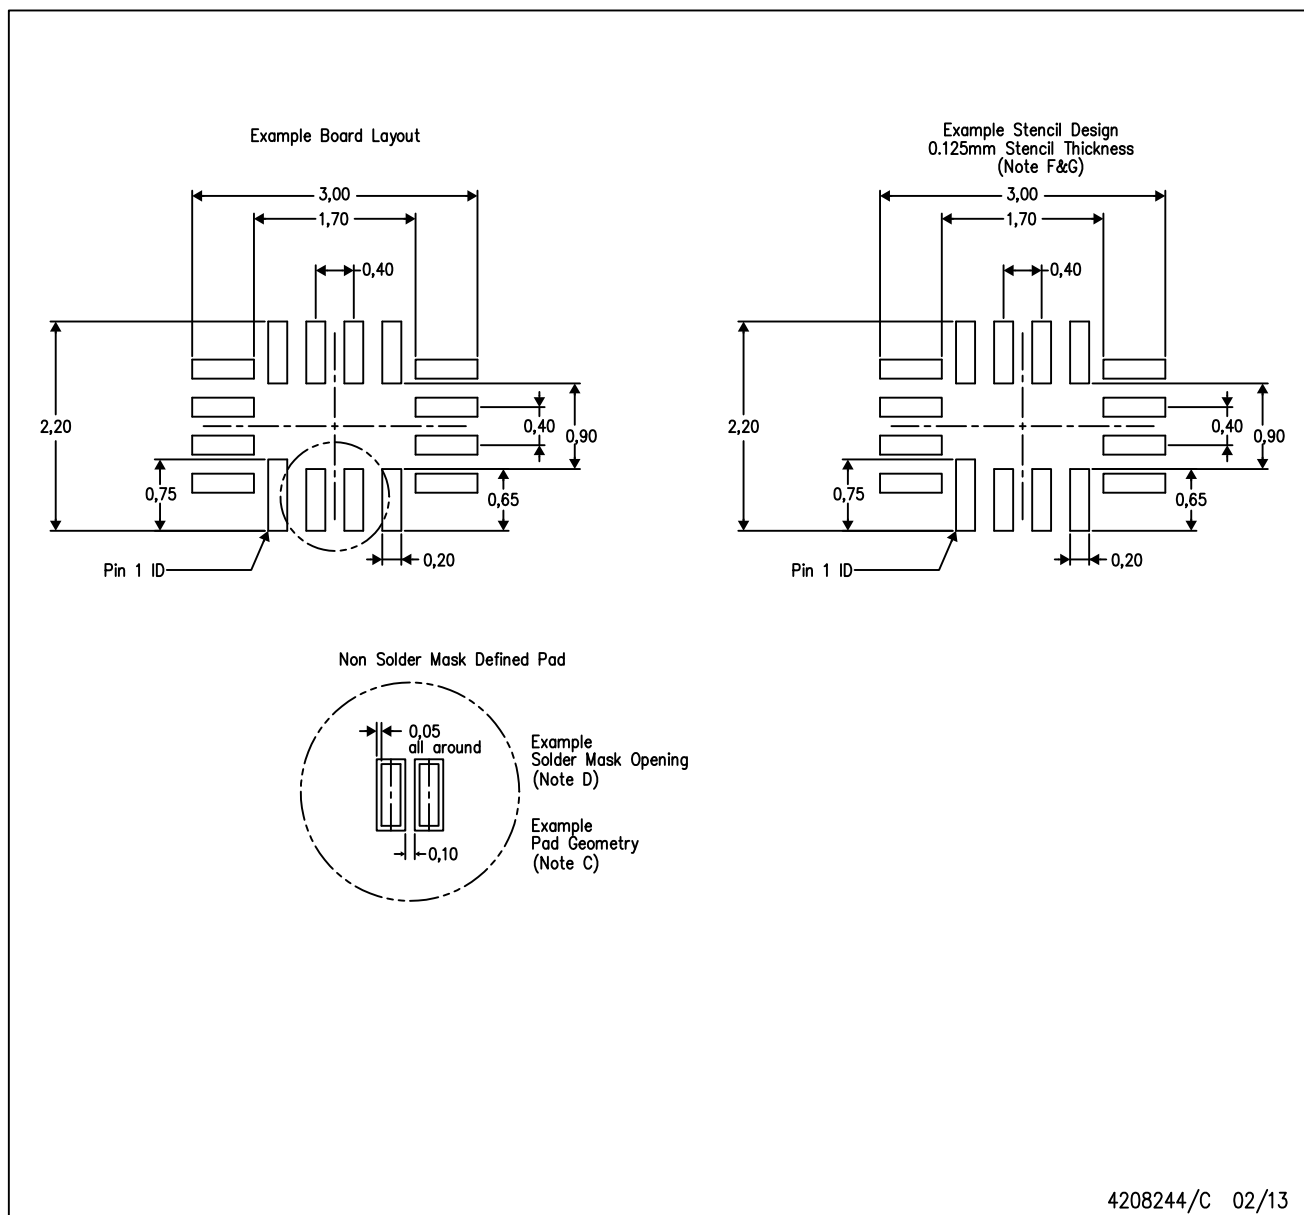

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.
  - E. Maximum stencil thickness 0,127 mm (5 mils). All linear dimensions are in millimeters.
  - F. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - G. Side aperture dimensions over-print land for acceptable area ratio > 0.66. Customer may reduce side aperture dimensions if stencil manufacturing process allows for sufficient release at smaller opening.

DBQ (R-PDSO-G16)


PLASTIC SMALL-OUTLINE PACKAGE

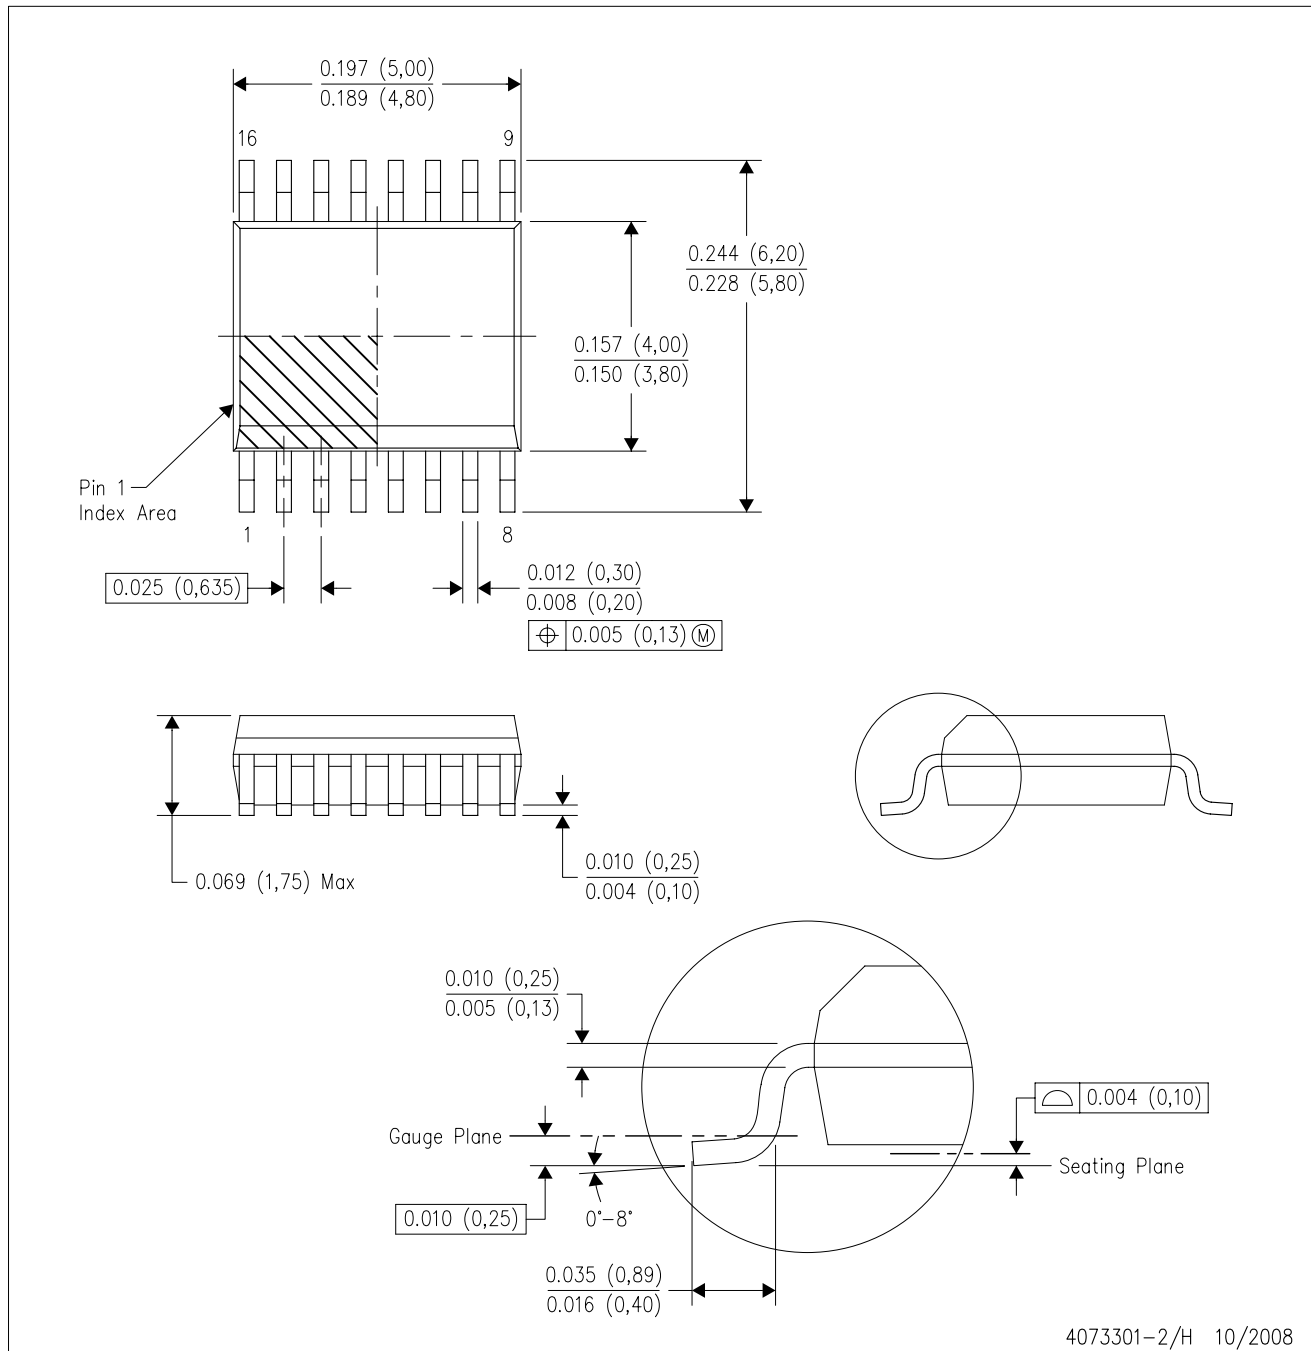

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15) per side.
  - D. Falls within JEDEC MO-137 variation AB.

DBQ (R-PDSO-G16)

PLASTIC SMALL OUTLINE PACKAGE

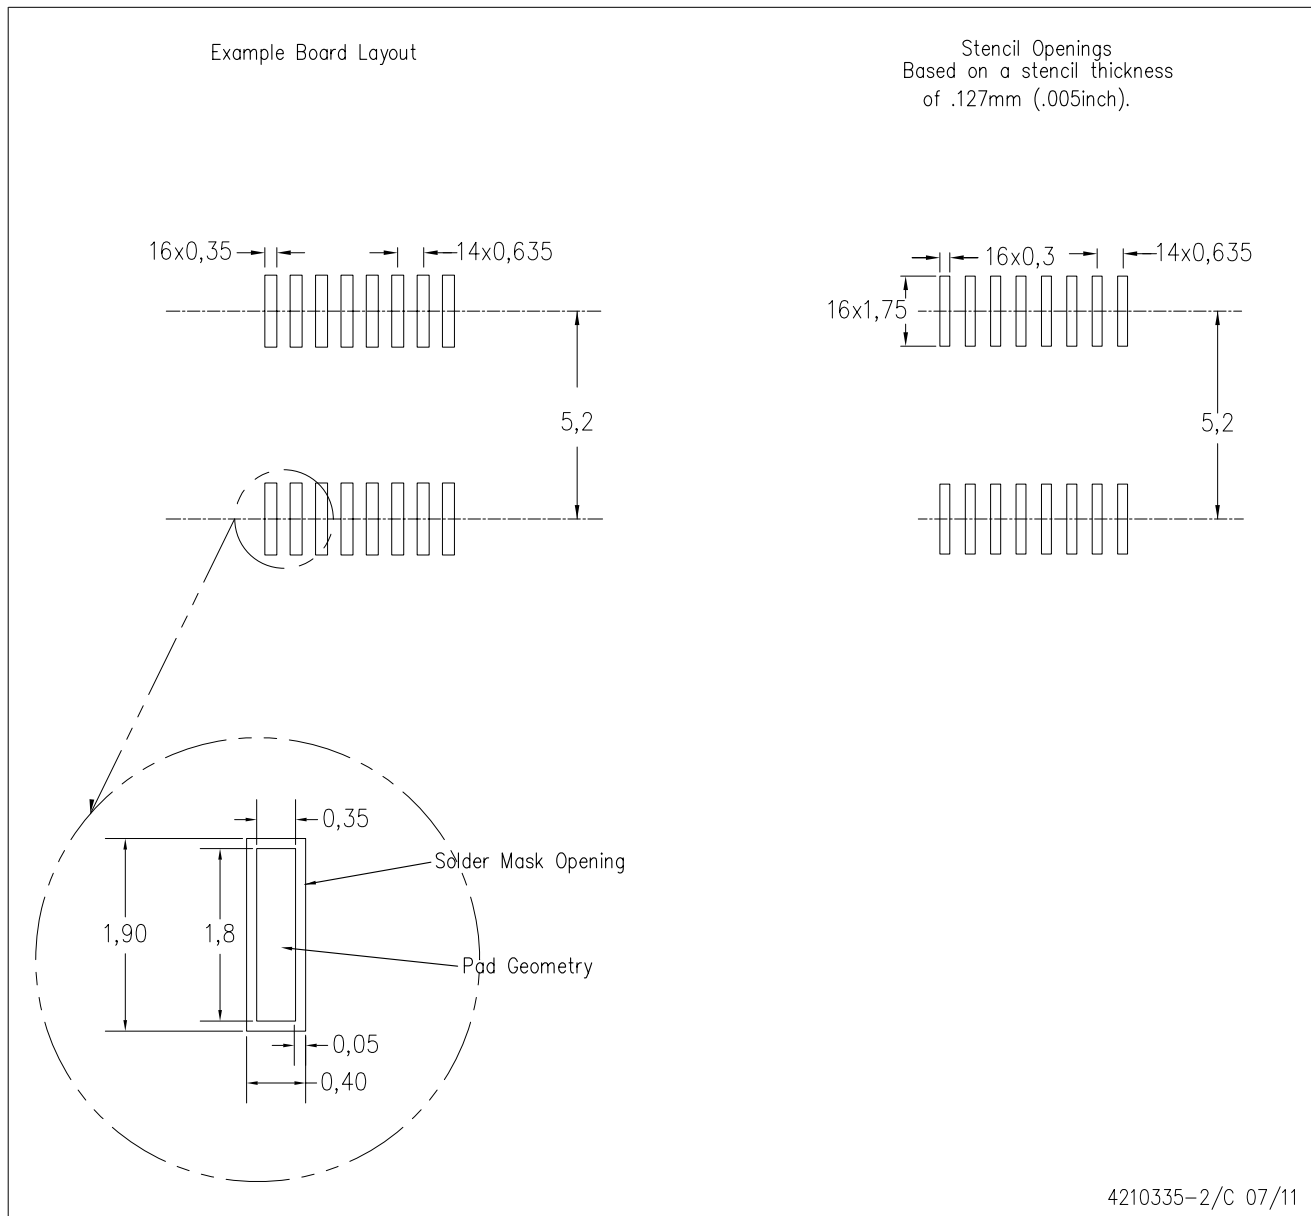

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
  - Publication IPC-7351 is recommended for alternate designs.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)